

ILLUMINAZIONE & TEHNIČKA



LM29130

Aluminium, IP20, Cut-out size 76mm, Ø92*h22mm



WHITE/WHITE

LM29130R

Ring for 29130



WHITE



BLACK



SILVER



GOLD




WHITE/WHITE



WHITE/BLACK



WHITE/SILVER



WHITE/GOLD



BLACK/WHITE



BLACK/BLACK



BLACK/SILVER



BLACK/GOLD




SILVER/WHITE



SILVER/BLACK



SILVER/SILVER



SILVER/GOLD



GOLD/WHITE



GOLD/BLACK



GOLD/SILVER



GOLD/GOLD

LM29131

Aluminium, IP20, Cut-out size 76mm, 92*92*h22mm

LM29130R

Ring for 29131



BLACK/BLACK



WHITE



BLACK



SILVER



GOLD




WHITE/WHITE



WHITE/BLACK




WHITE/SILVER




WHITE/GOLD




BLACK/WHITE



BLACK/BLACK



BLACK/SILVER



BLACK/GOLD



SILVER/WHITE



SILVER/BLACK



SILVER/SILVER



SILVER/GOLD




GOLD/WHITE



GOLD/BLACK



GOLD/SILVER



GOLD/GOLD

LM29134

Aluminium, IP20, Cut-out size 65mm, Ø72*h42mm



BLACK/BLACK



BLACK/WHITE



WHITE/BLACK



WHITE/WHITE



RING BLACK



RING WHITE

LM9039

Aluminium, IP20, Cut-out size 60mm, Ø68*h72mm, include GU10 lampholder



SAND BLACK+GOLD



SAND WHITE+ALUMINIUM

LM9041

Aluminium, IP20, Cut-out size 60mm,
Ø68*h55mm, include GU10 lampholder



SAND BLACK+GOLD



SAND WHITE+ALUMINIUM

LM9042

Aluminium, IP20, Cut-out size 60mm,
Ø68*h55mm, include GU10 lampholder



SAND BLACK+GOLD



SAND WHITE+ALUMINIUM

LM1022 B (AR111)

Aluminium, IP20, Ø120*80mm, include GU10 lampholder



SAND BLACK



SAND WHITE

RETTANGOLARE R+130/96 ALU

230V~50Hz, GU10, MAX 50W

SQUARE REFLECTOR




BK/SILVER



SILVER



BK



GOLD



WH



BK/SILVER



BK/BK



BK/GOLD



BK/WH



DARK GREY/
SILVER



DARK GREY/
BK



DARK GREY/
GOLD



DARK GREY/
WH



SILVER/SILVER



SILVER/BK



SILVER/GOLD



SILVER/WH



WHITE/SILVER



WHITE/BK





WHITE/GOLD



WHITE/WH

▪ Dimenzije:

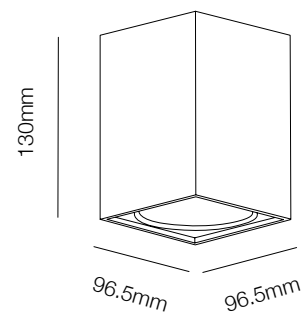

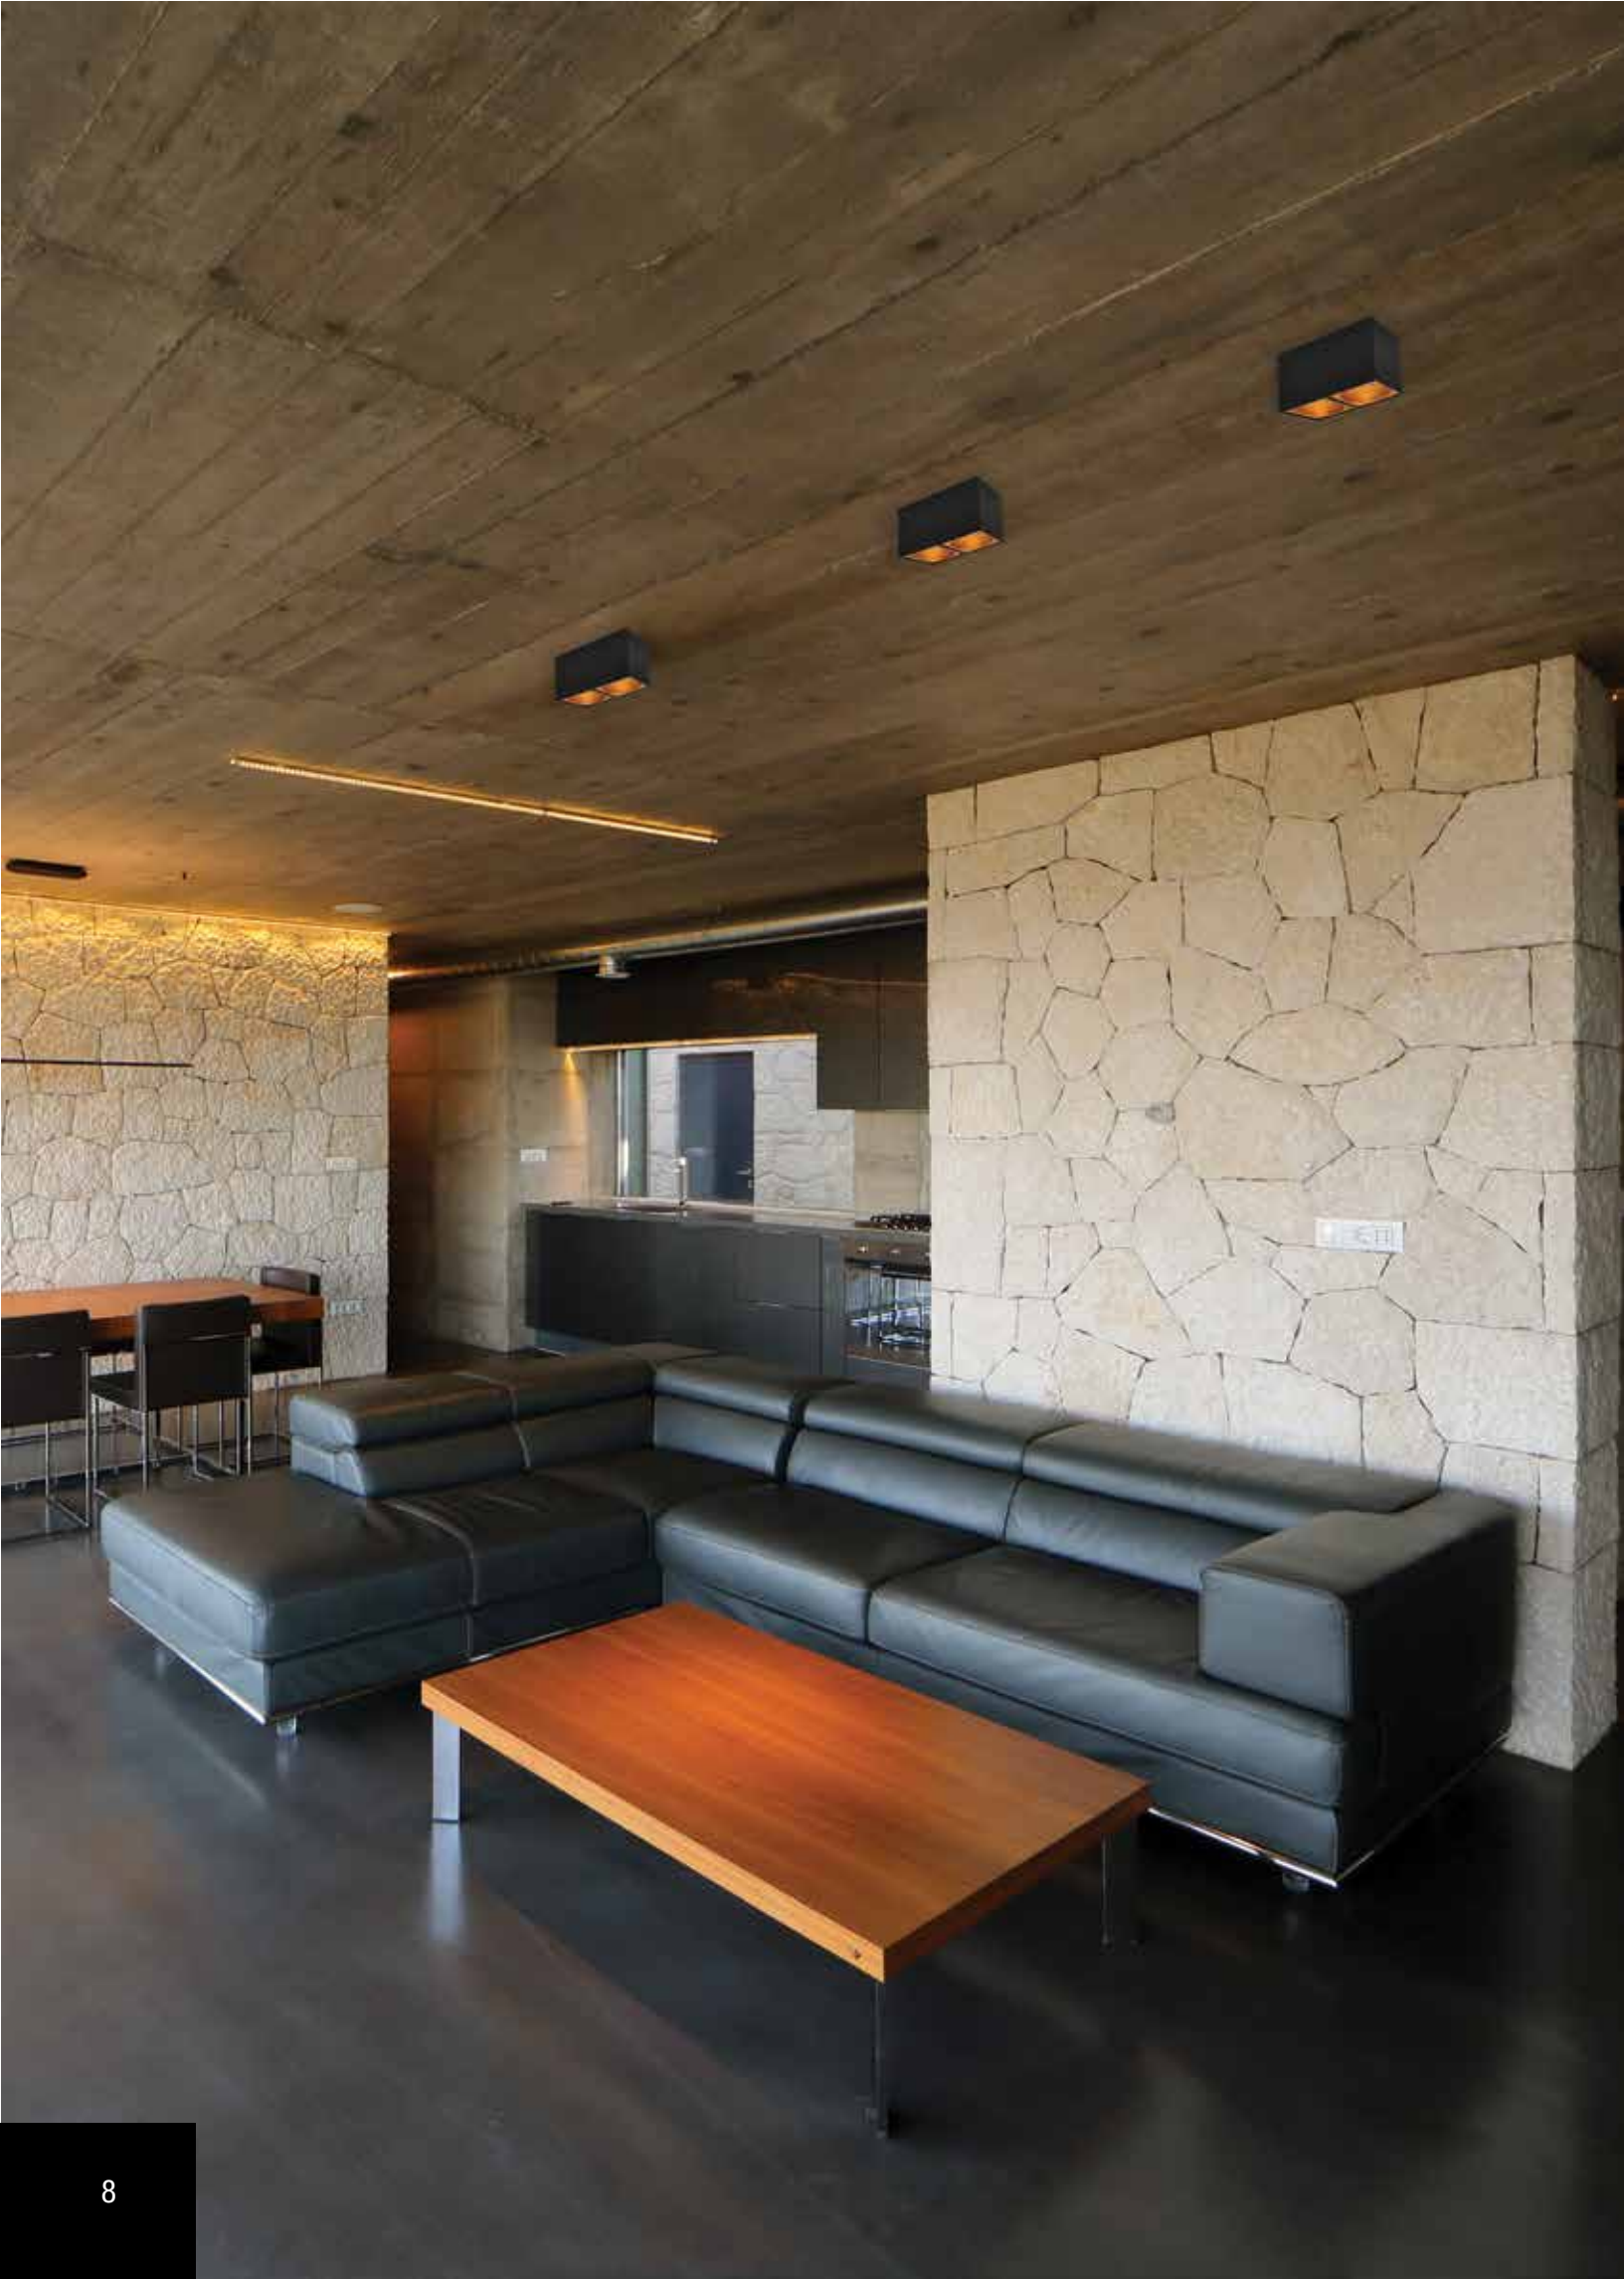

RETTANGOLARE DOPPIO


R+130/96x2 ALU

230V~50Hz, GU10, 2 x MAX 50W



DARK GREY/GOLD

SQUARE REFLECTOR

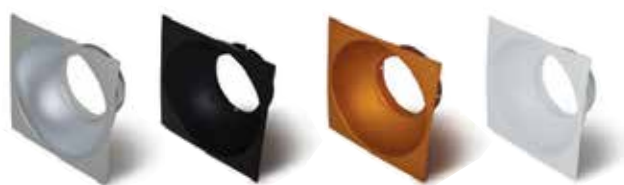

SILVER

BK

GOLD


WH



BK/SILVER



BK/BK



BK/GOLD




BK/WH



DARK GREY/
SILVER




DARK GREY/
BK



DARK GREY/
GOLD




DARK GREY/
WH



SILVER/SILVER



SILVER/BK



SILVER/GOLD




SILVER/WH



WHITE/SILVER



WHITE/BK




WHITE/GOLD



WHITE/WH

▪ Dimenzije:

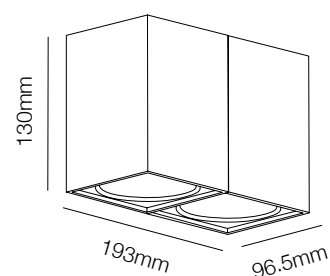

RETTANGOLARE R+254/96 ALU

230V~50Hz, GU10, MAX 50W

SQUARE REFLECTOR



SILVER

BK


GOLD

WH



WHITE/BK

▪ Dimenzije:

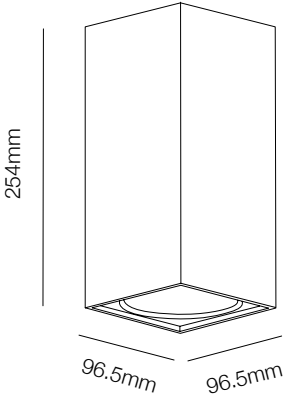

BK/SILVER



BK/BK



BK/GOLD



BK/WH



DARK GREY/
SILVER



DARK GREY/
BK



DARK GREY/
GOLD



DARK GREY/
WH



SILVER/SILVER



SILVER/BK



SILVER/GOLD



SILVER/WH



WHITE/SILVER



WHITE/BK



WHITE/GOLD



WHITE/WH



ROTONDO R+130/96 ALU

230V-50Hz, GU10, MAX 50W



DARK GREY/BK

ROUND REFLECTOR



SILVER

BK

GOLD

WH



BK/SILVER



BK/BK



BK/GOLD



BK/WH



DARK GREY/
SILVER



DARK GREY/
BK



DARK GREY/
GOLD



DARK GREY/
WH



SILVER/SILVER



SILVER/BK



SILVER/GOLD



SILVER/WH



WHITE/SILVER



WHITE/BK




WHITE/GOLD



WHITE/WH

• Dimenzije:

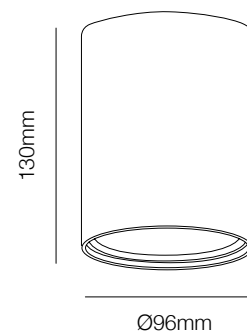

ROTONDO R+254/96 ALU

230V~50Hz, GU10, MAX 50W

ROUND REFLECTOR



SILVER

BK


GOLD

WH



WHITE/GOLD

▪ Dimenzije:

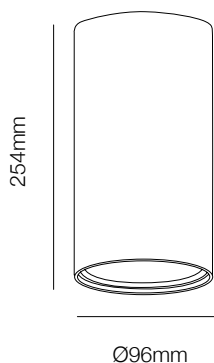

254mm

Ø96mm



BK/SILVER



BK/BK



BK/GOLD



BK/WH



DARK GREY/
SILVER



DARK GREY/
BK



DARK GREY/
GOLD



DARK GREY/
WH



SILVER/SILVER



SILVER/BK



SILVER/GOLD



SILVER/WH



WHITE/SILVER



WHITE/BK



WHITE/GOLD



WHITE/WH



ROTONDO R+254/96 ALU


230V~50Hz, GU10, MAX 50W

ROUND REFLECTOR



BK/BK

▪ Dimenzije:

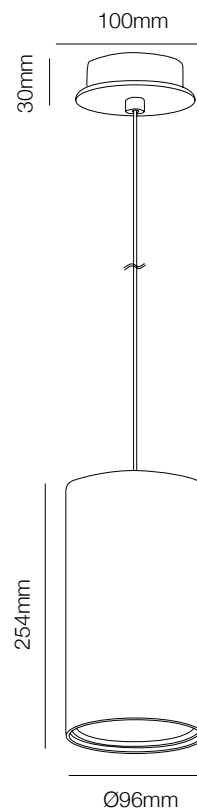


ROTONDO 125/96 ALU



BK

▪ **Dimenzije:**

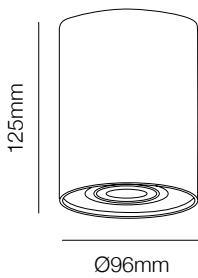

ROTONDO 125/96 ALU	BK	230V~50Hz, GU10, MAX 50W
---------------------------	----	--------------------------

ROTONDO 125/96 ALU	DARK GREY	230V~50Hz, GU10, MAX 50W
---------------------------	-----------	--------------------------

ROTONDO 125/96 ALU	SILVER	230V~50Hz, GU10, MAX 50W
---------------------------	--------	--------------------------

ROTONDO 125/96 ALU	WHITE	230V~50Hz, GU10, MAX 50W
---------------------------	-------	--------------------------



DARK GREY



SILVER



WHITE



ROTONDO MINI 100/56 ALU


ROTONDO MINI 100/96 ALU	BK	230V~50Hz, GU10, MAX 50W
--------------------------------	----	--------------------------

ROTONDO MINI 100/96 ALU	DARK GREY	230V~50Hz, GU10, MAX 50W
--------------------------------	-----------	--------------------------

ROTONDO MINI 100/96 ALU	SILVER	230V~50Hz, GU10, MAX 50W
--------------------------------	--------	--------------------------

ROTONDO MINI 100/96 ALU	WHITE	230V~50Hz, GU10, MAX 50W
--------------------------------	-------	--------------------------

▪ **Dimenzije:**

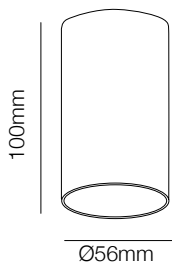

SILVER



BK



DARK GREY



WHITE



LM 1004

LM1004R CHROME

LM1004R COFFEE

LM1004R BLACK CHROME

LM1004R BRASS

▪ **Dimenzije:** Ø96x140mm



CHROME



COFFEE



BLACK CHROME



BRASS



LM 1004R



CHROME



COFFEE



BLACK CHROME



BRASS

LM1004R CHROME

LM1004R COFFEE

LM1004R BLACK CHROME


LM1004R BRASS

FARETTO Q1 ALU

FARETTO Q1 ALU DARK GREY 230V~50Hz, GU10, MAX 50W

FARETTO Q1 ALU WHITE 230V~50Hz, GU10, MAX 50W


▪ **Dimenzije:**

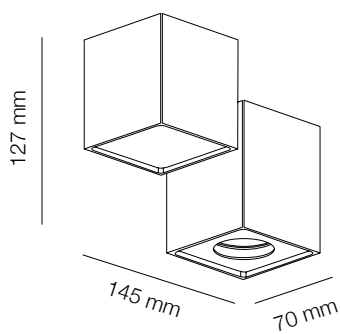

DARK GREY



WHITE

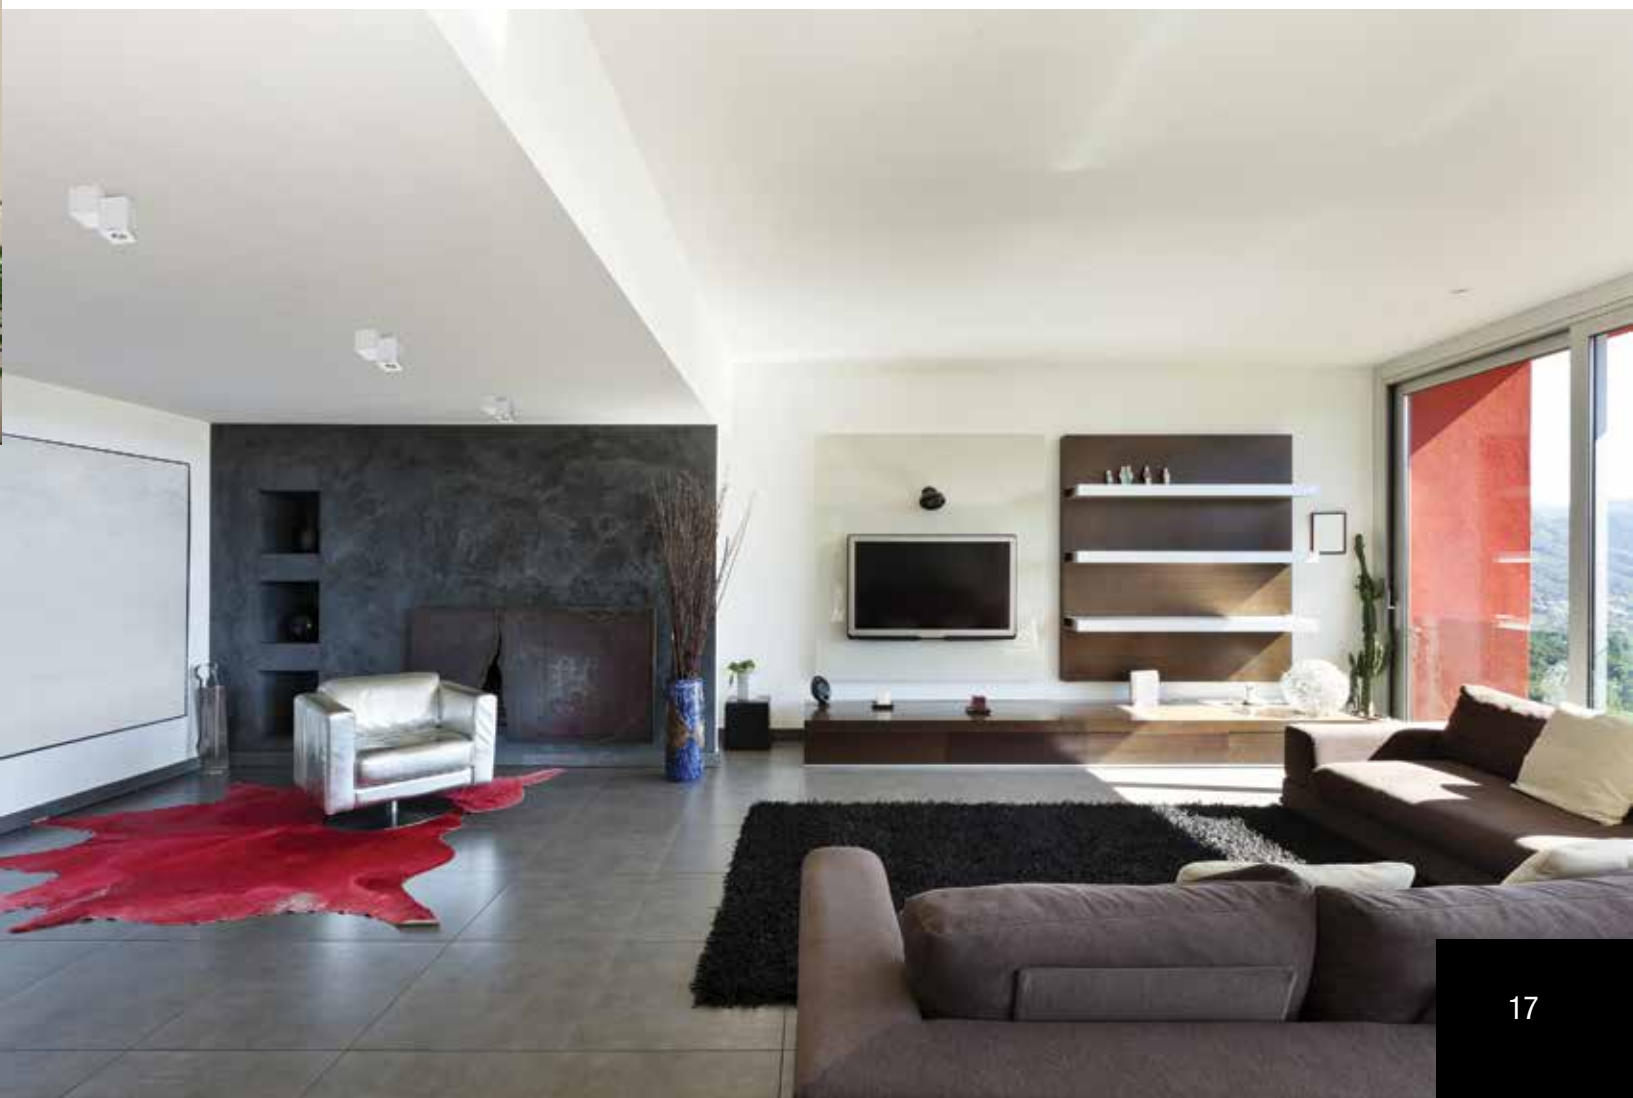




FARETTO Q2 ALU

FARETTO Q2 ALU DARK GREY 230V~50Hz, GU10, 2 x MAX 50W

FARETTO Q2 ALU WHITE 230V~50Hz, GU10, 2 x MAX 50W

▪ **Dimenzije:**

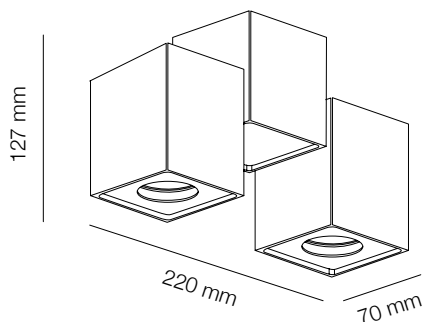

WHITE



DARK GREY





FARETTO R1 ALU

FARETTO R1 ALU DARK GREY 230V~50Hz, GU10, MAX 50W

FARETTO R1 ALU WHITE 230V~50Hz, GU10, MAX 50W

▪ **Dimenzije:**

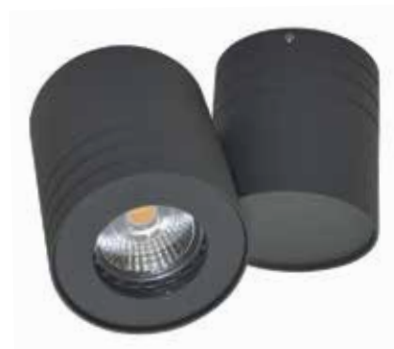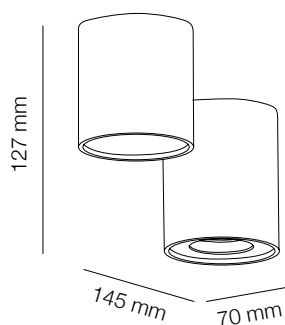

DARK GREY




WHITE

FARETTO R2 ALU

FARETTO R2 ALU DARK GREY 230V~50Hz, GU10, 2 x MAX 50W

FARETTO R2 ALU WHITE 230V~50Hz, GU10, 2 x MAX 50W

▪ **Dimenzije:**

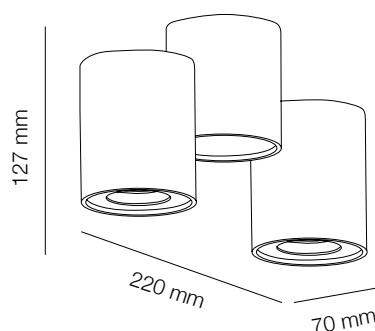

WHITE



DARK GREY

SBR-6660-GU

SBR-6660-GU-WH SANDY WHITE GU10 1 x MAX 50W

SBR-6660-GU-DG SANDY DARK GREY GU10 1 x MAX 50W

SBR-6660-GU-BK SANDY BLACK GU10 1 x MAX 50W

▪ **Dimenzije:** Ø70x150mm




SANDY WHITE



SANDY BLACK



SANDY DARK GREY

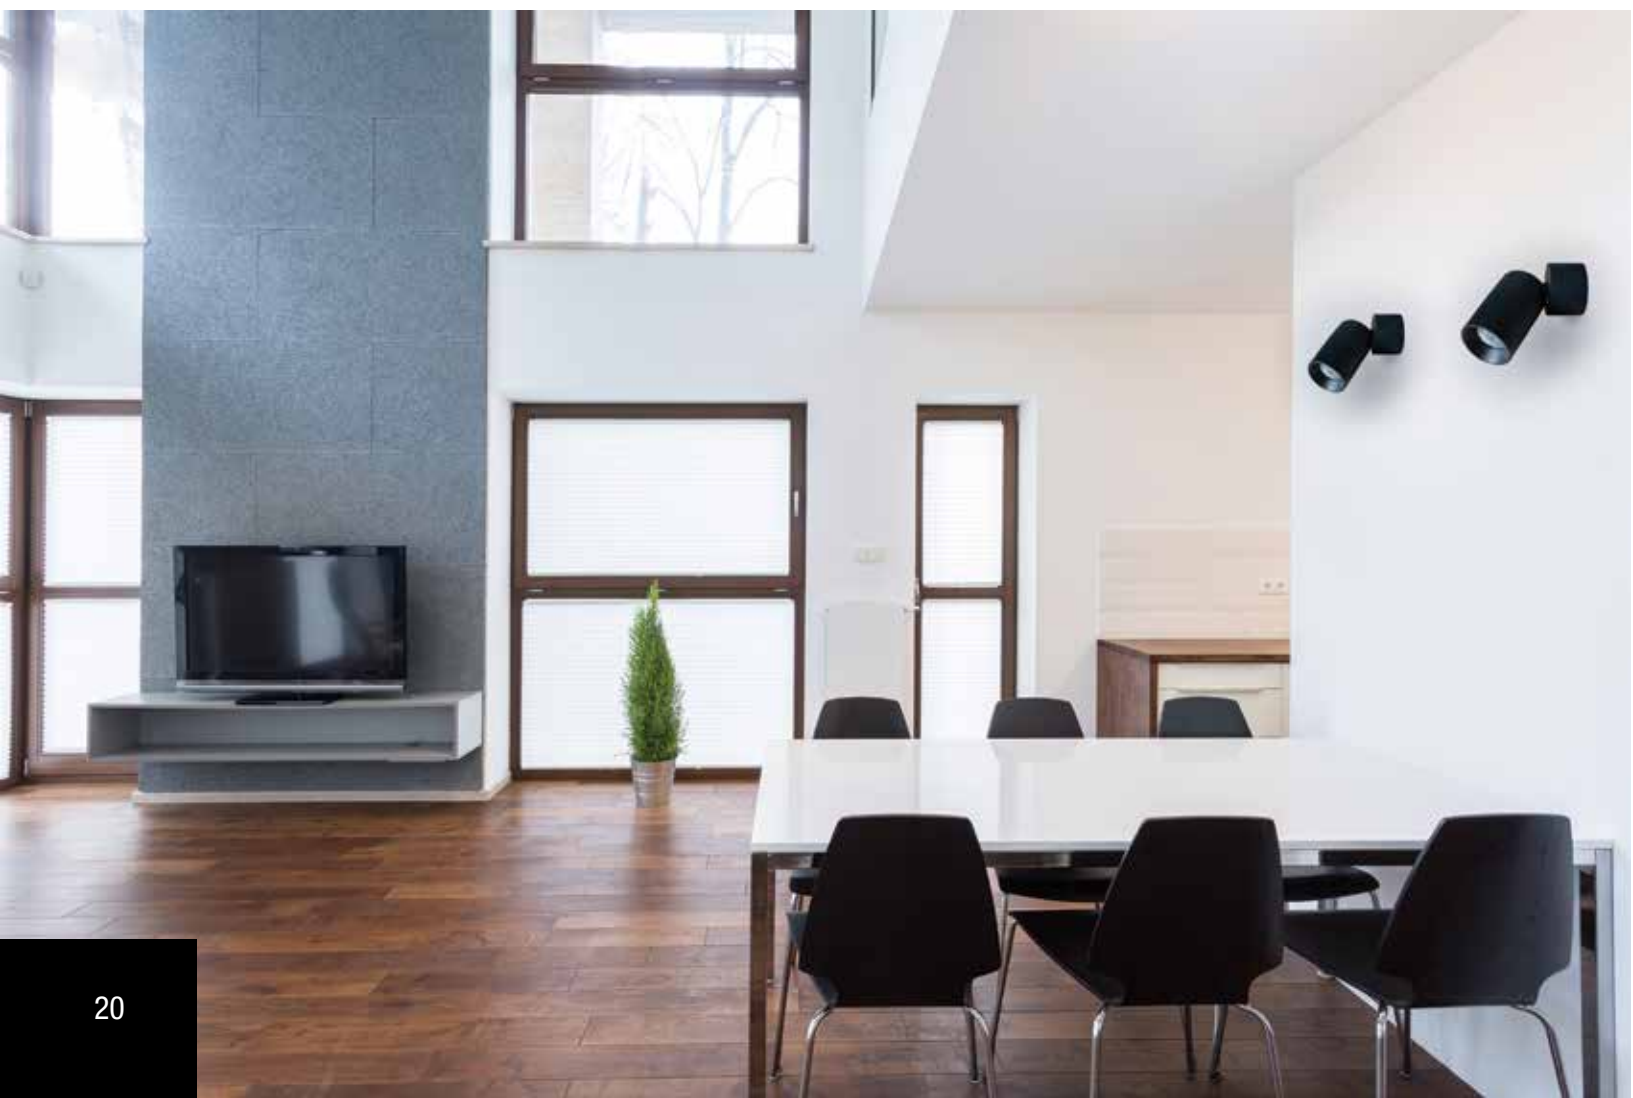



MURO



SAND WHITE



SAND BLACK

MURO SAND WHITE GU10 1 x MAX 50W, IP20

MURO SAND BLACK GU10 1 x MAX 50W, IP20

▪ **Dimenzije:** 120x60x130mm

SOFFITO SINGOLO

SOFFITO SINGOLO SAND WHITE GU10 1 x MAX 50W, IP20

SOFFITO SINGOLO SAND BLACK GU10 1 x MAX 50W, IP20

▪ **Dimenzije:** Ø90x130mm



SAND BLACK



SAND WHITE

SOFFITO

SOFFITO DOPPIO SW	SAND WHITE	GU10, 2x50W, IP20
SOFFITO DOPPIO SB	SAND BLACK	GU10, 2x50W, IP20

▪ **Dimension:** 310*60*130mm

SOFFITO TRIPLA SW	SAND WHITE	GU10, 3x50W, IP20
SOFFITO TRIPLA SB	SAND BLACK	GU10, 3x50W, IP20

▪ **Dimension:** 520*60*130mm

SOFFITO QUADRUPLO SW	SAND WHITE	GU10, 4x50W, IP20
SOFFITO QUADRUPLO SB	SAND BLACK	GU10, 4x50W, IP20

▪ **Dimension:** 730*60*130mm



SOFFITO DOPPIO SW



SOFFITO DOPPIO SB



SOFFITO TRIPLA SB



SOFFITO TRIPLA SW



SOFFITO QUADRUPLO SW



SOFFITO QUADRUPLO SB



MURO



TONDO BK/GOLD



TONDO WH/SILVER



RETTANGOLARE WH/SILVER



RETTANGOLARE BK/GOLD



OVALE BK/GOLD



OVALE WH/SILVER

MURO TONDO	BK/GOLD	G9, 40W, IP20
MURO TONDO	WH/SILVER	G9, 40W, IP20

▪ **Dimension:** 102*82,5*100mm

MURO RETTANGOLARE	BK/GOLD	G9, 40W, IP20
MURO RETTANGOLARE	WH/SILVER	G9, 40W, IP20

▪ **Dimension:** 102*80*100mm

MURO OVALE	BK/GOLD	G9, 40W, IP20
MURO OVALE	WH/SILVER	G9, 40W, IP20

▪ **Dimension:** 150*80*90mm

RETTANGOLARE

RETTANGOLARE A/P 1846 SINGOLO ALU-DG GU10, 50W, IP20

RETTANGOLARE A/P 1846 SINGOLO ALU-WH GU10, 50W, IP20

▪ **Dimension:** 69*90*100mm

RETTANGOLARE A/P 1846 DOPPIO ALU-DG GU10, 2x50W, IP20

RETTANGOLARE A/P 1846 DOPPIO ALU-WH GU10, 2x50W, IP20

▪ **Dimension:** 60*90*170mm



RETTANGOLARE
SINGOLO ALU/DG



RETTANGOLARE
SINGOLO ALU/WH



RETTANGOLARE
DOPPIO ALU/DG



RETTANGOLARE
DOPPIO ALU/WH



ROTONDA
SINGOLO ALU/DG



ROTONDA
SINGOLO ALU/WH

ROTONDA

ROTONDA A/P 1846 SINGOLO ALU-DG GU10, 50W, IP20

ROTONDA A/P 1846 SINGOLO ALU-WH GU10, 50W, IP20

▪ **Dimension:** Ø96*h80mm

ROTONDA A/P 1846 DOPPIO ALU-DG GU10, 2x50W, IP20

ROTONDA A/P 1846 DOPPIO ALU-WH GU10, 2x50W, IP20

▪ **Dimension:** Ø96*h140mm



ROTONDA
DOPPIO ALU/WH



ROTONDA
DOPPIO ALU/DG

SPOT BIANCO

SPOT BIANCO SINGLE GU10, 50W, IP20

- **Dimension:** 110*110*150mm

SPOT BIANCO DOPPIO GU10, 2x50W, IP20

- **Dimension:** 230*110*150mm




SPOT DOPPIO



SPOT SINGLE

GQD

GQD2021 MR16 (GU10), MAX 35W

▪ **Dimension:** 118 x 118 x 65mm ▪ 120 x 120mm 

GQD2014 MR16 (GU10), MAX 35W

▪ **Dimension:** 135 x 135 x 56mm ▪ 137 x 137mm 


GQD2031 MR16 (GU10), 35W

▪ **Dimension:** Ø131 x 55mm

GQD2036A MR16 (GU10), 35W

▪ **Dimension:** 116 x 116 x 80mm

GQD4009 AR111 (GU10)

▪ **Dimension:** 215 x 215 x 75mm ▪ 218 x 218mm 



GQD2014



GQD2021



GQD2031



GQD4009



GQD2036A




LM 5002M

LM 5002M BLACK CHROME

LM 5002M BRASS

LM 5002M CHROME

LM 5002M COFFEE

▪ **Dimension:** Ø90mm ▪ Ø70mm 



BLACK CHROME



BRASS



CHROME



COFFEE



R-3160-GU

R-3160-GU BK	BK	GU10
R-3160-GU BK	GOLD	GU10
R-3160-GU BK	WH	GU10
R-3160-GU BK	SILVER	GU10
R-3160-GU DG	BK	GU10
R-3160-GU DG	GOLD	GU10
R-3160-GU DG	WH	GU10
R-3160-GU DG	SILVER	GU10
R-3160-GU WH	BK	GU10
R-3160-GU WH	GOLD	GU10
R-3160-GU WH	WH	GU10
R-3160-GU WH	SILVER	GU10

▪ **Dimension:** Ø114mm ▪ Ø104mm 



WH/GOLD

ROUND REFLECTOR



SILVER

BK

GOLD

WH



BK/BK



BK/GOLD



BK/WH



BK/SILVER



DG/BK



DG/GOLD



DG/WH



DG/SILVER



WH/BK



WH/GOLD



WH/WH



WH/SILVER

S-3161-GU

S-3161-GU BK	BK	GU10
S-3161-GU BK	GOLD	GU10
S-3161-GU BK	WH	GU10
S-3161-GU BK	SILVER	GU10
S-3161-GU DG	BK	GU10
S-3161-GU DG	GOLD	GU10
S-3161-GU DG	WH	GU10
S-3161-GU DG	SILVER	GU10
S-3161-GU WH	BK	GU10
S-3161-GU WH	GOLD	GU10
S-3161-GU WH	WH	GU10
S-3161-GU WH	SILVER	GU10

▪ **Dimension:** 114x114mm ▪ \varnothing 104mm 



ROUND REFLECTOR



SILVER

BK

GOLD

WH



BK/BK



BK/GOLD



BK/WH



BK/SILVER



DG/BK



DG/GOLD



DG/WH



DG/SILVER



WH/BK



WH/GOLD




WH/WH



WH/SILVER

S-3162-GU

S-3162-GU BK	BK	2xGU10
S-3162-GU BK	GOLD	2xGU10
S-3162-GU BK	WH	2xGU10
S-3162-GU BK	SILVER	2xGU10
S-3162-GU DG	BK	2xGU10
S-3162-GU DG	GOLD	2xGU10
S-3162-GU DG	WH	2xGU10
S-3162-GU DG	SILVER	2xGU10
S-3162-GU WH	BK	2xGU10
S-3162-GU WH	GOLD	2xGU10
S-3162-GU WH	WH	2xGU10
S-3162-GU WH	SILVER	2xGU10

▪ **Dimension:** 115x233mm ▪ 100x222mm 



DG/BK

ROUND REFLECTOR



SILVER

BK

GOLD

WH



BK/BK



BK/GOLD



BK/WH



BK/SILVER



DG/BK



DG/GOLD



DG/WH



DG/SILVER



WH/BK



WH/GOLD



WH/WH




WH/SILVER

APL 4611,4612,4613 BRUSH ALU

APL 4611 BRUSH ALU

AR111 (GU10)

- **Dimension:** 180x180x85mm
- Ø160mm 

APL 4612 BRUSH ALU


2 x AR111 (GU10)

- **Dimension:** 180x340x85mm
- 160x320mm 

APL 4613 BRUSH ALU

3 x AR111 (GU10)

- **Dimension:** 180x508x85mm
- 160x480mm 



LED 230V



HALOGEN 12V; 230V



CFL 230V



APL 4611 BRUSH ALU





APL 4613 BRUSH ALU










APL 4612 BRUSH ALU



APL 2611,3611 BRUSH ALU/BLACK ALU

APL 2611 BRUSH ALU	AR111 (GU10)
APL 3611 BRUSH ALU	AR111 (GU10)
▪ Dimension: Ø180x85mm	▪ Ø180mm 
APL 2611 BLACK ALU	AR111 (GU10)
APL 3611 BLACK ALU	AR111 (GU10)
▪ Dimension: Ø180x85mm	▪ Ø180mm 



LED 230V



HALOGEN 12V; 230V



CFL 230V



APL 2611 BRUSH ALU



APL 3611 BRUSH ALU






APL 2611BLACK ALU




APL 3611 BLACK ALU



APL 4611,4612,4613 BLACK ALU

APL 4611 BLACK ALU	AR111 (GU10)
▪ Dimension: 180x180x85mm	▪ Ø160mm 
APL 4612 BLACK ALU	2 x AR111 (GU10)
▪ Dimension: 180x340x85mm	▪ 160x320mm 
APL 4613 BLACK ALU	3 x AR111 (GU10)
▪ Dimension: 180x508x85mm	▪ 160x480mm 



LED 230V



HALOGEN 12V; 230V



CFL 230V




APL 4611 BLACK ALU








APL 4613 BLACK ALU





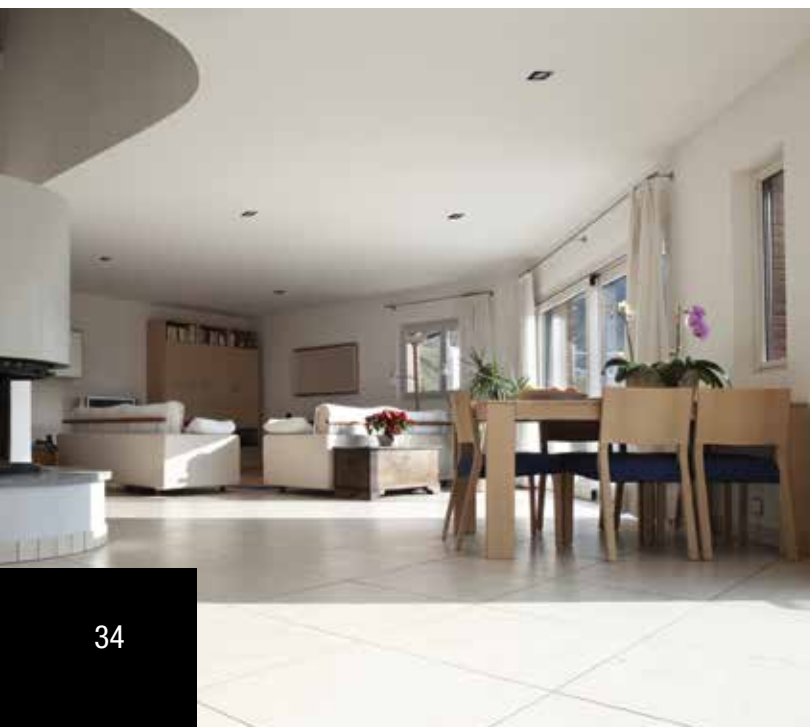




APL 4612 BLACK ALU



APL 4611, 4612, 4613, 2611, 3611 MATT WHITE

APL 4611 MATT WHITE	AR111 (GU10)
▪ Dimension: 180x180x85mm	▪ Ø160mm 
APL 4612 MATT WHITE	2 x AR111 (GU10)
▪ Dimension: 180x340x85mm	▪ 160x320mm 
APL 4613 MATT WHITE	3 x AR111 (GU10)
▪ Dimension: 180x508x85mm	▪ 160x480mm 
APL 2611 MATT WHITE	AR111 (GU10)
▪ Dimension: Ø158x85mm	▪ Ø138mm 
APL 3611 MATT WHITE	AR111 (GU10)
▪ Dimension: Ø180x85mm	▪ Ø160mm 



LED 230V



HALOGEN 12V; 230V



CFL 230V



APL 4611 MATT WHITE



APL 4612 MATT WHITE



APL 4613 MATT WHITE





APL 2611 MATT WHITE



APL 3611 MATT WHITE

ELC 1111,2111 SILVER/WHITE

ELC 1111 SILVER	AR111 G53
▪ Dimension: 205x205x100mm	▪ 170x170mm 
ELC 2111 SILVER	2 x AR111 G53
▪ Dimension: 205x350x100mm	▪ 170x310mm 
ELC 1111 WHITE	AR111 G53
▪ Dimension: 205x205x100mm	▪ 170x170mm 
ELC 2111 WHITE	2 x AR111 G53
▪ Dimension: 205x350x100mm	▪ 170x310mm 

CE   IP20  



HALOGEN 12V; 230V



CFL 230V



ELC 1111 SILVER



ELC 2111 SILVER







ELC 1111 WHITE



ELC 2111 WHITE



R 60A, Q61A, Q1661, Q1662 ALU WH

R 60A ALU	WHITE	230V~50Hz, GU10, MAX 50W
▪ Dimension: Ø76x37mm	▪ Ø64mm	
Q 61A ALU	WHITE	230V~50Hz, GU10, MAX 50W
▪ Dimension: 77x77x37mm	▪ Ø68mm	
Q 1661 ALU	WHITE	230V~50Hz, GU10, MAX 50W
▪ Dimension: 110x110x37mm	▪ 98x98mm	
Q 1662 ALU	WHITE	230V~50Hz, GU10, 2xMAX 50W
▪ Dimension: 206x110x37mm	▪ 98x192mm	



LED 230V



HALOGEN 12V; 230V



CFL 230V



R 60A ALU WH



Q 61A ALU WH





Q 1662 ALU WH



Q 1661 ALU WH

Q 2161, Q 2162 ALU WH/ALU ALU

Q 2161 ALU WH	230V~50Hz, GU10, MAX 50W
Q 2161 ALU ALU	230V~50Hz, GU10, MAX 50W
<ul style="list-style-type: none"> ▪ Dimension: 100x100x31mm ▪ Ø90mm 	
Q 2162 ALU WH	230V~50Hz, GU10, 2xMAX 50W
Q 2162 ALU ALU	230V~50Hz, GU10, 2xMAX 50W
<ul style="list-style-type: none"> ▪ Dimension: 198x100x31mm ▪ 90x180mm 	



Q 2161 ALU WH



Q 2161 ALU ALU



Q 2162 ALU WH




Q 2162 ALU ALU

APL 4391, 4392, 4393 BRUSH ALU

APL 4391 BRUSH ALU

MR16 (GU10)

▪ **Dimension:** 92x92x54mm

▪ Ø80mm 

APL 4392 BRUSH ALU

2 x MR16 (GU10)

▪ **Dimension:** 175x92x85mm

▪ 165x80mm 

APL 4393 BRUSH ALU


3 x MR16 (GU10)

▪ **Dimension:** 260x92x85mm

▪ 245x80mm 



APL 4391 BRUSH ALU



LED 12V; 230V



HALOGEN 12V; 230V



CFL 230V






APL 4392 BRUSH ALU



APL 4393 BRUSH ALU



APL 8205, 339, 9205 BRUSH ALU

APL 8205 BRUSH ALU	MR16 (GU10)
▪ Dimension: Ø90x42mm	▪ Ø75mm 
APL 339 BRUSH ALU	MR16 (GU10)
▪ Dimension: Ø92x54mm	▪ Ø80mm 
APL 9205 BRUSH ALU	MR16 (GU10)
▪ Dimension: 90x90x42mm	▪ Ø75mm 



LED 12V; 230V

HALOGEN 12V; 230V

CFL 230V



APL 4391S BRUSH ALU



APL 339S BRUSH ALU



APL 8205 BRUSH ALU



APL 339 BRUSH ALU



APL 9205 BRUSH ALU

APL 4391S, 339S BRUSH ALU

APL 4391S BRUSH ALU	GU10
▪ Dimension: 90x90x85mm	
APL 339S BRUSH ALU	GU10
▪ Dimension: Ø90x85mm	




APL 4391, 4392, 4393 MATT WH (ALU)

APL 4391 MATT WH (ALU)

MR16 (GU10)

▪ **Dimension:** 92x92x54mm

▪ Ø80mm 

APL 4392 MATT WH (ALU)

MR16 (GU10)

▪ **Dimension:** 175x92x85mm

▪ 165x80mm 

APL 4393 MATT WH (ALU)

MR16 (GU10)

▪ **Dimension:** 260x92x85mm

▪ 245x80mm 



LED 12V; 230V



HALOGEN 12V; 230V



CFL 230V



APL 4391 MATT WH (ALU)



APL 4392 MATT WH (ALU)



APL 4393 MATT WH (ALU)



APL 8205 MATT WH (ALU)



APL 9205 MATT WH (ALU)

APL 8205, 9205 MATT WH (ALU)

APL 8205 MATT WH (ALU)

MR16 (GU10)

▪ **Dimension:** Ø90x42mm

▪ Ø75mm 

APL 9205 MATT WH (ALU)

MR16 (GU10)

▪ **Dimension:** 90x90x42mm

▪ Ø75mm 



APL 4391S, 339S MATT WH (ALU)

APL 4391S MATT WH (ALU) MR16 (GU10)

▪ **Dimension:** 90x90x85mm

APL 339S MATT WH (ALU) MR16 (GU10)

▪ **Dimension:** Ø90x85mm

CE IP20 



LED 12V; 230V



HALOGEN 12V; 230V



CFL 230V



APL 4391S MATT WH (ALU)



APL 339S MATT WH (ALU)




APL 4391-2, 4392-2, 4393-2 BLACK ALU

APL 4391-2 BLACK ALU

MR16 (GU10)

▪ **Dimension:** 92x92x54mm

▪ Ø80mm 

APL 4392-2 BLACK ALU

MR16 (GU10)

▪ **Dimension:** 175x92x85mm

▪ 165x80mm 

APL 4393-2 BLACK ALU

MR16 (GU10)

▪ **Dimension:** 260x92x85mm

▪ 245x80mm 



APL 4391-2 BLACK ALU



APL 4392-2 BLACK ALU



APL 4393-2 BLACK ALU



LED 12V; 230V



HALOGEN 12V; 230V



CFL 230V



APL 8205 BLACK ALU



APL 339-2 BLACK ALU



APL 9205 BLACK ALU

APL 8205, 339-2, 9205 BLACK ALU

APL 8205 BLACK ALU

MR16 (GU10)


▪ **Dimension:** Ø90x42mm

▪ Ø75mm 

APL 339-2 BLACK ALU

MR16 (GU10)

▪ **Dimension:** Ø92x54mm

▪ Ø80mm 

APL 9205 BLACK ALU

MR16 (GU10)

▪ **Dimension:** 90x90x42mm

▪ Ø75mm 



LED 12V; 230V







HALOGEN 12V; 230V



CFL 230V



CRY-02, CRY-02S, DG-100, DGS-100

CRY-02	MR16 (GU10)
▪ Dimension: Ø90x55mm	▪ Ø70mm 
CRY-02S	MR16 (GU10)
▪ Dimension: 90x90x55mm	▪ Ø70mm 
DG-100	MR16 (GU10)
▪ Dimension: Ø90x58mm	▪ Ø60mm 
DGS-100	MR16 (GU10)
▪ Dimension: 90x90x58mm	▪ Ø60mm 



LED 12V; 230V



HALOGEN 12V; 230V



CFL 230V



CRY-02



CRY-02S




DG-100



DGS-100

ELC-348 MR/MATT WHITE

ELC-348 MR	GU10
ELC-348 MATT WHITE	GU10
<ul style="list-style-type: none"> Dimension: 90x90x72mm 80x80mm  	

CE IP20 



ELC-348 MR



ELC-348 MATT WHITE




ELC-3160 MATT WHITE




ELC-3160 MATT BLACK

ELC-3160 MATT WHITE/MATT BLACK

ELC-3160 MATT WHITE	GU10
ELC-3160 MATT BLACK	GU10
<ul style="list-style-type: none"> Dimension: Ø105x94mm Ø94mm  	

CE IP20 

ELC-3280 MATT WHITE/BLACK

ELC-3280 MATT WHITE	GU10
ELC-3280 BLACK	GU10
<ul style="list-style-type: none"> Dimension: Ø85x66mm Ø77mm  	

30° CE  12V IP20  0.5m 



ELC-3280 MATT WHITE



ELC-3280 BLACK

ELC-144 WH/CH/NM

ELC-144 WH MR16 (GU10)

ELC-144 CH MR16 (GU10)

ELC-144 NM MR16 (GU10)

▪ **Dimension:** 75x75mm ▪ Ø62mm 

CE  (12V) IP20  



LED 12V; 230V



HALOGEN 12V; 230V



CFL 230V



ELC-144 WH



ELC-144 CH



ELC-144 NM



ELC-429 CH



ELC-429 WH



ELC-429 NM

ELC-429 WH/CH/NM

ELC-429 WH MR16 (GU10)

ELC-429 CH MR16 (GU10)

ELC-429 NM MR16 (GU10)

▪ **Dimension:** 82x82mm ▪ Ø75mm 

CE  (12V) IP20  



LED 12V; 230V



HALOGEN 12V; 230V



CFL 230V

ELC-205

WH/CH/NM/GM

ELC-205 WH	MR16 (GU10)
ELC-205 CH	MR16 (GU10)
ELC-205 NM	MR16 (GU10)
ELC-205 GM	MR16 (GU10)

▪ **Dimension:** Ø80x30mm ▪ Ø58mm 

CE   IP20  



LED 12V; 230V HALOGEN 12V; 230V CFL 230V



ELC-205 WH



ELC-205 CH



ELC-205 NM




ELC-205 GM



ELC-229 WH/MATT WH/ /CH/NM/GM

ELC-229 MATT WH	MR16 (GU10)
ELC-144 WH	MR16 (GU10)
ELC-144 CH	MR16 (GU10)
ELC-144 NM	MR16 (GU10)
ELC-144 GM	MR16 (GU10)

■ **Dimension:** Ø83mm ■ Ø75mm 










ELC-229 MATT WH



ELC-229 WH



ELC-229 CH



ELC-229 NM




ELC-229 GM



ELC-212 WH/ CH/NM/GM (3009)

ELC-212 WH (3009)	MR16 (GU10)
ELC-212 CH (3009)	MR16 (GU10)
ELC-212 NM (3009)	MR16 (GU10)
ELC-212 GM (3009)	MR16 (GU10)

▪ **Dimension:** Ø102x38.5mm ▪ Ø80mm 



ELC-212 WH (3009)



ELC-212 CH (3009)

CE  12V IP20  



LED 12V; 230V



HALOGEN 12V; 230V



CFL 230V



ELC-212 NM (3009)




ELC-212 GM (3009)



ELC-218N NM/WH/MBK

ELC-218N NM	GU10
ELC-218N WH	GU10
ELC-218N MBK	GU10

▪ **Dimension:** Ø110mm ▪ Ø90mm 

 **MAX 50W**   **IP20**  **0.5m**  **45°**  **350°**



LED 12V; 230V



HALOGEN 12V; 230V



CFL 230V



ELC-218N NM



ELC-218N WH



ELC-218N MBK



ELC-217 NMAWH

ELC-217 NM GU10

ELC-217 WH GU10

▪ **Dimension:** 100x100mm ▪ 87x87mm 

CE IP20 



LED 12V, 230V



HALOGEN 12V, 230V



CFL 230V



ELC-217 NM




ELC-217 WH




APL-2291NF APL-1602F

APL-2291NF G5.3 (GU10) IP65

▪ Ø70mm 

APL-1602F G5.3 (GU10) IP65

▪ Ø62mm 



APL-2291NF



APL-1602F

ELC-1101B WH/NM


ELC-1101B WH

MR16 IP65

ELC-1101B NM

MR16 IP65

▪ **Dimension:** Ø85mm

▪ Ø74mm 



LED 12V



HALOGEN 12V



ELC-1101B NM



ELC-1101B WH



ELC-1104B WH



ELC-1104B NM

ELC-1104B WH/NM

ELC-1104B WH

MR16 IP65

ELC-1104B NM

MR16 IP65

▪ **Dimension:** 82x82mm

▪ Ø74mm 



LED 12V



HALOGEN 12V

ELC-1203C1 WH/NM


ELC-1203C1 WH

MR16 IP65

ELC-1203C1 NM

MR16 IP65

▪ **Dimension:** Ø100mm

▪ Ø80mm 



LED 12V



HALOGEN 12V



ELC-1203C1 WH



ELC-1203C1 NM

KD-C7013PL

KD-C7013PL-3W-03 WHITE

KD-C7013PL-3W-03 GREY

- **Dimension:** Ø70x13mm
- Ø55-60mm 
- Power 3w 12pcs 2835SMD
- NW 4000K
- Input Voltage DC 12V
- Luminous 270-300lm
- Beam angle 120°
- Material Aluminium+PC Cover



KD-C7013PL-3W-03 WHITE



KD-C7013PL-3W-03 GREY



LED NAPAANJE GSPV-15W-12V



LED NAPAANJE LDE-12V12W

LED NAPAANJE

LED NAPAANJE GSPV-15W-12V 15W, DC12V

- **Dimension:** 122x38x18mm

LED NAPAANJE LDE-12V12W 12W

- **Dimension:** 94x45x27.5mm

DIMMER

DIMMER 96650

- **Dimension:** 60x12.5x6mm
- Radni napon: DC12V/24V
- Max. opterećenje: DC12V/24V DC24V/48V
- Struje mirovanja: 0.3mA
- Radna temperatura: -20 - +45°C
- Metoda regulacije: Kontrola napona

- **Napomena:** Ovaj proizvod je dizajniran za klasu III izolacije uređaja, temelji se na ljudskom dodiru. Kad se unutar 0.5s dodirne površina, prekidač promijeni stanje (ON/OFF). Kad se dodirna površina drži duže od 0.5s, prekidač smanjuje, odnosno pojačava intenzitete svjetla.



Prikaz instalacije:



LED 512,513,514,515

LED 512 1W MWH 4000K

AC100-265V RA>82

▪ **Dimension:** 50x24mm

▪ Ø21mm 

LED 513 1W MWH 4000K

AC100-265V RA>82

▪ **Dimension:** 50x35mm

▪ Ø32mm 

LED 514 2W 6000K

DC 3,6V, 500mA, 2W LED CREE, Led napajanje u kompletu AC 230V

▪ **Dimension:** 25x58mm

▪ Ø20mm 

LED 515 2W 6000K

DC 3,6V, 500mA, 2W LED CREE, Led napajanje u kompletu AC 230V

▪ **Dimension:** 25x25x58mm

▪ Ø20mm 



LED 512 1W MWH 4000K



LED 513 1W MWH 4000K



LED 514 2W 6000K




LED 515 2W 6000K




LED 502,506

LED 502 1W 6000K DC3,6V, 350mA, Led napajanje u kompletu

- **Dimension:** 60x89mm
- Ø52mm 

LED 506 1W 6000K DC3,6V, 350mA, Led napajanje u kompletu

- **Dimension:** 45x48mm
- Ø35mm 



LED 506 1W 6000K



LED 502 1W 6000K

LED-IP65-SMD-SPOT LIGHT 3000K/4000K

LED-IP65-SMD-SPOT LIGHT 3000K 230V, 5W, ROUND WHITE

LED-IP65-SMD-SPOT LIGHT 4000K 230V, 5W, ROUND WHITE

- **Dimension:** Ø82x50mm
- Ø63mm 



LED-IP65-SMD-SPOT LIGHT

TANGO BLACK MATT 0,8W

TANGO BLACK MATT 0,8W

WALL LED LIGHT

COLOR (K): White 6000K

▪ **Dimension:** 73x73x10,5mm

▪ Ø60mm



TANGO BLACK MATT 0,8W

TANGO STAINLESS STEEL 0,8W

TANGO STAINLESS STEEL 0,8W

WALL LED LIGHT

COLOR (K): Warm white

▪ **Dimension:** 73x73x10,5mm

▪ Ø60mm



TANGO STAINLESS STEEL 0,8W

TANGO STICK ALUMINIUM 0,8W

TANGO STICK ALUMINIUM 0,8W

WALL LED LIGHT

COLOR (K): Warm white

▪ **Dimension:** 73x73mm

▪ Ugradnja na ljepljenje



TANGO STICK ALUMINIUM 0,8W



TANGO MAX ALUMINIUM 1,6W

TANGO MAX ALUMINIUM 1,6W WALL LED LIGHT COLOR (K): Warm white

- **Dimension:** 143X73X10,5mm
- Ugradnja na ljepljenje



TANGO MAX ALUMINIUM 1,6W

TANGO MINI STICK ALUMINIUM 0,4W

TANGO MINI STICK ALUMINIUM 0,4W WALL LED LIGHT COLOR (K): Warm white

- **Dimension:** 60X60mm
- Ugradnja na ljepljenje



TANGO MINI STICK ALUMINIUM 0,4W

TANGO SHORT STAINLESS STEEL IP56 0,8W

TANGO SHORT STAINLESS STEEL IP56 0,8W WALL LED LIGHT

- **Dimension:** 73X73X10,5mm
- Ø60mm
- COLOR (K): Warm white



TANGO SHORT STAINLESS STEEL IP56 0,8W



RUEDA STAINLESS STEEL 0,8W

TANGO STAINLESS STEEL 0,8W

WALL LED LIGHT

- **Dimension:** Ø73X10,5mm
- COLOR (K): Warm white

- Ø60mm



TANGO STAINLESS STEEL 0,8W

RUEDA STICK ALUMINIUM 0,8W

TANGO STAINLESS STEEL 0,8W

WALL LED LIGHT

- **Dimension:** Ø73mm
- COLOR (K): Warm white

- Ugradnja na ljepljenje



RUEDA STICK ALUMINIUM 0,8W



RUEDA MINI STICK ALUMINIUM 0,4W

RUEDA MINI ALUMINIUM STEEL 0,4W

WALL LED LIGHT

- **Dimension:** Ø73mm
- COLOR (K): Warm white

- Ugradnja na ljepljenje



RUEDA MINI STICK ALUMINIUM 0,4W

RUEDA SHORT STAINLESS STEEL IP56 0,8W



RUEDA SHORT STAINLESS STEEL IP56 0,8W WALL LED LIGHT


RUEDA SHORT STAINLESS STEEL IP65 0,8W

- **Dimension:** Ø73x10,5mm
- Ø60mm 
- **COLOR (K):** Warm white

POWER SUPPLY TYPE ZOL 7

POWER SUPPLY TYPE ZOL 7

RATED POWER 7W

- **Dimension:** Ø53X25mm
- Ø60mm 
- IP44




POWER SUPPLY TYPE ZOL 7

POWER SUPPLY TYPE ZOL 15

POWER SUPPLY TYPE ZOL 7

RATED POWER 15W

- **Dimension:** Ø53X32mm
- Ø60mm 
- IP44



POWER SUPPLY TYPE ZOL 15

POWER SUPPLY TYPE ZOL 6

POWER SUPPLY TYPE ZOL 7

RATED POWER 6W

- **Dimension:** 93x35x22mm
- IP65



POWER SUPPLY TYPE ZOL 6

RUMBA ALUMINIUM WARM WHITE STICK

RUMBA ALUMINIUM WARM WHITE STICK 0,8W WALL LED LIGHT

- **Dimension:** 150x40mm



RUMBA ALUMINIUM WARM WHITE STICK

BOLERO OL 7 BLACK

BOLERO OL 7 BLACK

WARM WHITE 1,8W, 3000K

- **Dimension:** Ø76mm
- Ø60mm 



BOLERO OL 7 BLACK

SALSA SHORT MATT BRASS IP66 0,8W

SALSA SHORT MATT BRASS IP66 0,8W

WALL LED LIGHT

- **Dimension:** 73x73mm
- Ø60mm 
- **COLOR (K):** Warm white



SALSA SHORT MATT BRASS IP66 0,8W

SALSA STICK MATT BRASS IP20 0,8W

SALSA STICK MATT BRASS IP20 0,8W

WALL LED LIGHT

- **Dimension:** 73x73mm
- Ugradnja na ljepljenje
- **COLOR (K):** Warm white



SALSA STICK MATT BRASS IP20 0,8W

SALSA MAX MATT BRASS IP20 1,6W

SALSA MAX MATT BRASS IP20 1,6W

WALL LED LIGHT

- **Dimension:** 143x73mm
- Ugradnja na ljepljenje
- **COLOR (K):** Warm white



SALSA MAX MATT BRASS IP20 1,6W

TANGO BLACK IP66 0,8W

TANGO BLACK IP66 0,8W

WALL LED LIGHT

- **Dimension:** 73x73mm
- Ø60mm
- **COLOR (K):** Warm white



TANGO BLACK IP66 0,8W

TANGO SHORT BLACK IP66 0,8W

TANGO SHORT BLACK IP66 0,8W

WALL LED LIGHT

- **Dimension:** 73x73mm
- Ø60mm
- **COLOR (K):** Warm white



TANGO SHORT BLACK IP66 0,8W

RUEDA BLACK IP66 0,8W

RUEDA BLACK IP66 0,8W

WALL LED LIGHT

- **Dimension:** Ø73mm
- Ø60mm
- **COLOR (K):** Warm white



RUEDA BLACK IP66 0,8W

RUEDA SHORT BLACK IP66 0,8W

RUEDA SHORT BLACK IP66 0,8W

WALL LED LIGHT

- **Dimension:** Ø73mm
- Ø60mm
- **COLOR (K):** Warm white



RUEDA SHORT BLACK IP66 0,8W

TANGO WHITE IP66 0,8W

TANGO WHITE IP66 0,8W

WALL LED LIGHT

- **Dimension:** 73x73mm
- COLOR (K): Warm white

▪ Ø60mm



TANGO WHITE IP66 0,8W

TANGO SHORT WHITE IP66 0,8W

TANGO SHORT WHITE IP66 0,8W

WALL LED LIGHT

- **Dimension:** 73x73mm
- COLOR (K): Warm white

▪ Ø60mm



TANGO SHORT WHITE IP66 0,8W

RUEDA WHITE IP66 0,8W

RUEDA WHITE IP66 0,8W

WALL LED LIGHT

- **Dimension:** Ø73mm
- COLOR (K): Warm white

▪ Ø60mm



RUEDA WHITE IP66 0,8W

RUEDA SHORT WHITE IP66 0,8W

RUEDA SHORT BLACK IP66 0,8W

WALL LED LIGHT

- **Dimension:** Ø73mm
- COLOR (K): Warm white

▪ Ø60mm




RUEDA SHORT WHITE IP66 0,8W

SD-P001-3WW/3DW

SD-P001-3WW 3000K

SD-P001-3DW 4000K

- **Dimension:** Ø83x13mm
- 3W round led panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- Ø68mm 
- CCT: SD-P001-3WW: 3000K
SD-P001-3DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P001-3WW/3DW

SD-P001-9WW/9DW

SD-P001-9WW 3000K

SD-P001-9DW 4000K

- **Dimension:** Ø145x13mm
- 9W round led panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- Ø132mm 
- CCT: SD-P001-9WW: 3000K
SD-P001-9DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P001-9WW/9DW





SD-P001-18WW/18DW

SD-P001-18WW 3000K

SD-P001-18DW 4000K

- **Dimension:** Ø220x13mm
- 18W round led panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- Ø205mm 
- CCT: SD-P001-18WW: 3000K
SD-P001-18DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P001-18WW/18DW

SD-P001-24WW/24DW

SD-P001-24WW 3000K

SD-P001-24DW 4000K

- **Dimension:** Ø300x35mm
- 9W round led panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- Ø280mm 
- CCT: SD-P001-24WW: 3000K
SD-P001-24DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz




SD-P001-24WW/24DW

SD-P002 3WW/3DW

SD-P002-3WW 3000K

SD-P002-3DW 4000K

- **Dimension:** 80x80mm
- 3W square led panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- 72x72mm 
- CCT: SD-P002-3WW: 3000K
SD-P002-3DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz




SD-P002-3WW/3DW



SD-P002 9WW/9DW

SD-P002-9WW 3000K

SD-P002-9DW 4000K

- **Dimension:** 150x150mm
- 9W square led panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- 130x130mm 
- CCT: SD-P002-9WW: 3000K
SD-P002-9DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P002-9WW/9DW



SD-P002 18WW/18DW

SD-P002-18WW 3000K

SD-P002-18DW 4000K

- **Dimension:** 220x220mm
- 200x200mm 
- 18W square led panel light
- CCT: SD-P002-18WW: 3000K
SD-P002-18DW: 4000K
- Lumen: 90-100lm/W
- Beam angle: 120°
- LED chip: Epistar
- Material: aluminium+PC
- 85-265V 50-60Hz




SD-P002-18WW/18DW

SD-P002 24WW/24DW

SD-P002-24WW 3000K

SD-P002-24DW 4000K

- **Dimension:** 300x300mm
- 280x280mm 
- 24W square led panel light
- CCT: SD-P002-24WW: 3000K
SD-P002-24DW: 4000K
- Lumen: 90-100lm/W
- Beam angle: 120°
- LED chip: Epistar
- Material: aluminium+PC
- 85-265V 50-60Hz



SD-P002-24WW/24DW



SD-P001S-6WW/6DW

SD-P001S-6WW 3000K

SD-P001S-6DW 4000K

▪ **Dimension:** Ø120mm

- 6W surface round panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- CCT: SD-P001S-6WW: 3000K
SD-P001S-6DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P001S-6WW/6DW

SD-P001S-12WW/12DW

SD-P001S-12WW 3000K

SD-P001S-12DW 4000K

▪ **Dimension:** Ø180mm

- 12W surface round panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- CCT: SD-P001S-12WW: 3000K
SD-P001S-12DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P001S-12WW/12DW

SD-P001S-18WW/18DW

SD-P001S-18WW 3000K

SD-P001S-18DW 4000K

▪ **Dimension:** Ø240mm

- 18W surface round panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- CCT: SD-P001S-18WW: 3000K
SD-P001S-18DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P001S-18WW/18DW

SD-P001S-24WW/24DW

SD-P001S-24WW 3000K

SD-P001S-24DW 4000K

▪ **Dimension:** Ø300mm

- 24W surface round panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- CCT: SD-P001S-24WW: 3000K
SD-P001S-24DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P001S-24WW/24DW

SD-P002S-6WW/6DW

SD-P002S-6WW 3000K

SD-P002S-6DW 4000K

- **Dimension:** 120x120mm
- 6W surface square panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- CCT: SD-P002S-6WW: 3000K
SD-P002S-6DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P001S-6WW/6DW

SD-P002S-12WW/12DW

SD-P001S-12WW 3000K

SD-P001S-12DW 4000K

- **Dimension:** 180x180mm
- 12W surface square panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- CCT: SD-P002S-12WW: 3000K
SD-P002S-12DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P002S-12WW/12DW

SD-P002S-18WW/18DW

SD-P002-18WW 3000K

SD-P002S-18DW 4000K

- **Dimension:** 240x240mm
- 18W surface square panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- CCT: SD-P002S-18WW: 3000K
SD-P002S-18DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P002S-18WW/18DW

SD-P002S-24WW/24DW

SD-P002S-24WW 3000K

SD-P002S-24DW 4000K

- **Dimension:** 300x300mm
- 24W surface square panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- CCT: SD-P002S-24WW: 3000K
SD-P002S-24DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P002S-24WW/24DW

SD-P001N-3WW/3DW

SD-P001N-3WW	3000K
SD-P001N-3DW	4000K

- **Dimension:** Ø85x13mm
- Ø68mm 

- 3W round led panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- CCT: SD-P001N-3WW: 3000K
SD-P001N-3DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P001N-3WW/3DW

SD-P001N-9WW/9DW

SD-P001N-9WW	3000K
SD-P001N-9DW	4000K




SD-P001N-9WW/9DW

- **Dimension:** Ø145x13mm
- Ø130mm 

- 9W round led panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- CCT: SD-P001N-9WW: 3000K
SD-P001N-9DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz

SD-P001N-18WW/18DW

SD-P001N-18WW	3000K
SD-P001N-18DW	4000K

- **Dimension:** Ø220x13mm
- Ø205mm 

- 18W round led panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- CCT: SD-P001N-18WW: 3000K
SD-P001N-18DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz



SD-P001N-18WW/18DW

SD-P001N-24WW/24DW

SD-P001N-24WW	3000K
SD-P001N-24DW	4000K




SD-P001N-24WW/24DW

- **Dimension:** Ø300x35mm
- Ø280mm 

- 24W round led panel light
- Lumen: 90-100lm/W
- LED chip: Epistar
- Material: aluminium+PC
- CCT: SD-P001N-24WW: 3000K
SD-P001N-24DW: 4000K
- Beam angle: 120°
- 85-265V 50-60Hz

SD-P005-6/12/24DW

SD-P005-6DW ANTRACIT AC220-240V, 6W, 120°, 4000K

- **Dimension:** Ø90x10mm
- Ø76mm 

SD-P005-12DW ANTRACIT AC220-240V, 12W, 120°, 4000K

- **Dimension:** Ø145x10mm
- Ø125mm 

SD-P005-24DW ANTRACIT AC220-240V, 24W, 120°, 4000K

- **Dimension:** Ø225x10mm
- Ø205mm 



SD-P005-6/12/24DW

SD-P005S-30DW

SD-P005S-30DW ANTRACIT AC220-240V, 30W, 120°, 4000K

- **Dimension:** Ø300x35mm



SD-P005S-30DW

SD-P006S-30DW

SD-P006S-30DW ANTRACIT AC220-240V, 30W, 120°, 4000K

- **Dimension:** 300x300x35mm



SD-P006S-30DW

SD-C019-4WW/4DW

SD-C019-4WW

3000K

SD-C019-4DW

4000K

▪ **Dimension:** Ø90mm

▪ Ø75mm



- 4W diffuse reflection round LED downlight
- LED chip: Epistar SMD 2835

- CCT: SD-C019-4WW: 3000K
SD-C019-4DW: 4000K
- CRI>80
- 85-265V 50-60Hz

SD-C019-9WW/9DW

SD-C019-9WW

3000K

SD-C019-9DW

4000K

▪ **Dimension:** Ø110mm

▪ Ø95mm



- 9W diffuse reflection round LED downlight
- LED chip: Epistar SMD 2835

- CCT: SD-C019-9WW: 3000K
SD-C019-9DW: 4000K
- CRI>80
- 85-265V 50-60Hz

SD-C019-12WW/12DW

SD-C019-12WW

3000K

SD-C019-12DW

4000K

▪ **Dimension:** Ø150mm

▪ Ø130mm



- 12W diffuse reflection round LED downlight
- LED chip: Epistar SMD 2835

- CCT: SD-C019-12WW: 3000K
SD-C019-12DW: 4000K
- CRI>80
- 85-265V 50-60Hz

SD-C019-18WW/18DW

SD-C019-18WW

3000K

SD-C019-18DW

4000K

▪ **Dimension:** Ø180mm

▪ Ø165mm



- 18W diffuse reflection round LED downlight
- LED chip: Epistar SMD 2835

- CCT: SD-C019-18WW: 3000K
SD-C019-18DW: 4000K
- CRI>80
- 85-265V 50-60Hz

SD-C019-24WW/24DW

SD-C019-24WW

3000K

SD-C019-24DW

4000K

▪ **Dimension:** Ø225mm

▪ Ø200mm



- 24W diffuse reflection round LED downlight
- LED chip: Epistar SMD 2835
- CCT: SD-C019-24WW: 3000K
SD-C019-24DW: 4000K
- CRI>80
- 85-265V 50-60Hz



SD-C019

SD-C020-8WW/8DW

SD-C020-8WW 3000K

SD-C020-8DW 4000K

▪ **Dimension:** 105x105mm ▪ 95x95mm 

- 8W diffuse reflection square LED downlight
- LED chip: Epistar SMD 2835

- CCT: SD-C020-8WW: 3000K
SD-C020-8DW: 4000K
- CRI>80
- 85-265V 50-60Hz




SD-C020

SD-C020-16WW/16DW

SD-C020-16WW 3000K

SD-C020-16DW 4000K

▪ **Dimension:** 140x140mm ▪ 130x130mm 

- 16W diffuse reflection square LED downlight
- LED chip: Epistar SMD 2835

- CCT: SD-C020-16WW: 3000K
SD-C020-16DW: 4000K
- CRI>80
- 85-265V 50-60Hz

SD-C020-20WW/20DW

SD-C020-20WW 3000K

SD-C020-20DW 4000K

▪ **Dimension:** 180x180mm ▪ 165x165mm 

- 20W diffuse reflection square LED downlight
- LED chip: Epistar SMD 2835

- CCT: SD-C020-20WW: 3000K
SD-C020-20DW: 4000K
- CRI>80
- 85-265V 50-60Hz

YSL12-1200280D

YSL12-1200280D DIMMABLE DRIVER

- ZA SD PANELE 3-8W



YSL12-1200280D



YSL36-5300280D

YSL36-5300280D

YSL36-5300280D DIMMABLE DRIVER

- ZA SD PANELE 9-16W

YSL40-9000280D

YSL40-9000280DD DIMMABLE DRIVER

- ZA SD PANELE 18-24W



YSL40-9000280D



YSL80-4500950D

YSL80-4500950D

YSL80-4500950D DIMMABLE DRIVER

- ZA SD PANELE 40W

LED-CL-1226, CL-1834

LED-CL-1226 12W, 230V, 800Lm, 3000K

- **Dimension:** 260x90mm

LED-CL-1834 18W, 230V, 1100Lm, 3000K

- **Dimension:** 340x90mm



LED-CL-1226

LED-CL-1834



LED-CL11

LED-CL11

LED-CL11 AC180-240V, 24W, 4000K, 1920lm, IP40, SILVER RING

- **Dimension:** 280x50,5mm

LED-CL22

LED-CL22-CIRCULAR AC220-240V, 18W, 1260lm, IP44, 3000K

- **Dimension:** Ø330mm

LED-CL22-CIRCULAR AC220-240V, 24W, 1680lm, IP44, 3000K

- **Dimension:** Ø380mm



LED-CL22

SD-P008S-40WW

SD-P008S-40WW 40W, 3000K, Jasmine series 3 years warranty, white lampbody

- **Dimension:** Ø300x37mm



SD-P008S-40WW



CL603A

CL603A 12W, 3000K, 38°, 860lm, IP65, DIMMABLE

- **Dimension:** Ø85x100mm
- Ø72mm 



CL603A

CL449

CL449 15W, 3000K, 38°, 1220lm, DIMMABLE

- **Dimension:** Ø105x70mm
- Ø95mm 



CL449

CL4491

CL4491 15W, 3000K, 38°, 1220lm, DIMMABLE


- **Dimension:** 105x105x70mm
- 98x98mm 



CL4491

SD C027-N

SD C027-N 18DW 18W, 4000K, 120-140lm, AC220-240V

- **Dimension:** Ø110mm
- Ø95mm 

SD C027-N 40DW 40W, 4000K, 120-140lm, AC220-240V

- **Dimension:** Ø165mm
- Ø150mm 



LED BATTEN

LED BATTEN 60cm 18W, 1500lm

- **Dimension:** 600x75x25,5mm

LED BATTEN 90cm 27W, 2300lm

- **Dimension:** 900x75x25,5mm

LED BATTEN 120cm 36W, 3000lm

- **Dimension:** 1200x75x25,5mm

- CRI (Ra): 80
- Color Temp.: 4000K
- Beam Angle: 120°
- Input: AC100-240V
- IP: 20
- Hz: 50
- PF: 0.9



LED BATTEN UL05M IP44

UL05M-H-12 40W, 4800lm, 5 years warranty

- **Dimension:** 1200x72x72,5mm

UL05M-H-15 60W, 7200lm, 5 years warranty

- **Dimension:** 1500x72x72,5mm



LED BATTEN LAMP

LED BATTEN-004-0.6m AC220-240V, 18W, 4000K, 1440lm, IP65

- **Dimension:** 65x75x600mm

LED BATTEN-004-1.2m AC220-240V, 36W, 4000K, 2880lm, IP65

- **Dimension:** 65x75x1200mm



A 0108

A 0108 ALUMINIUM PLATED GOLD, WITH 1 RING E27

A 0301

A 0301 ALUMINIUM PLATED BRONZE, WITH 1 RING E27



A 0108



A 0301

E27-LM

E27-LM STEEL PLATED BRONZE, EITH ONE RING E27

T 0102

T 0102 BRASS PLATED BRONZE, WITH SWITCH E27



T 0102



E27-LM

9006/1010N /9098

9006 ELECTRIC SWITCH PORCELAIN WHITE

1010N UTIČNICA, KERAMIČKO KUĆIŠTE, BIJELA

9098 RAZVODNA KUTIJA, KERAMIČKO KUĆIŠTE, BIJELA



9006



1010N

9098

ARMATURA BAKELIT

ARMATURA BAKELIT RAVNA

ARMATURA BAKELIT KOSA



ARMATURA BAKELIT RAVNA




ARMATURA BAKELIT KOSA

6303 OPAL

6303 OPAL Ø150mm, h=152mm, N=84,5mm



6303 OPAL



GRLO DR171

GRLO DR171 G5.3



GRLO DR171



GRLO DR281

GRLO DR281

GRLO DR281 GU10

GX10 LAMPHOLDER

GX10 LAMPHOLDER



GX10 LAMPHOLDER



LA2402 GX53 LAMPHOLDER

LA2402 GX53

LA2402 GX53 LAMPHOLDER

GRLO CP805/800F

GRLO CP 805 E-27

GRLO CP 800F E-27



GRLO CP805



GRLO CP800F

LED-MIL5, MIL7

LED-MIL5 AC220-240V, 9W, 850Lm, 4000K

▪ **Dimension:** 596mm

LED-MIL7 WHITE AC220-240V, 20W, 1600-1800Lm, 4000K, IP44

LED-MIL7 CHROME AC220-240V, 20W, 1600-1800Lm, 4000K, IP44

▪ **Dimension:** 678*53*65mm



MIL 7 CHROME



MIL 5



MIL 7 WHITE

LED MIRROR ML-WS50

LED MIRROR ML-WS50 AC220-240V, 20W, 1600Lm


▪ **Dimension:** 900x53x65mm



CE RoHS



WATERPROOF SWITCH:

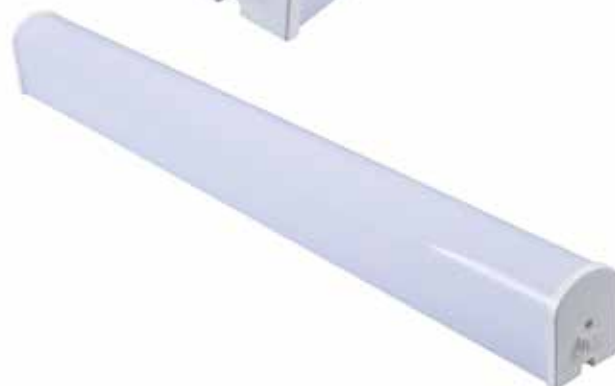



- 1x18W, 2x18W
- 1x36W, 2x36W
- 1x58W, 2x58W



0 1x18W	662x81x93mm
0 2x18W	662x130x93mm
0 1x36W	1270x81x93mm
0 2x36W	1270x130x93mm
0 1x58W	1562x81x93mm
0 2x58W	1562x130x93mm

- Kućište je namijenjeno isključivo led cijevima s priključnim kontaktima na jednoj strani!



ZATVORENE IP20 ARMATURE ZA LED CIJEVI



U1 0 1x18W	IP20, 705x115mm
U1 0 2x18W	IP20, 705x145mm
U1 0 1x36W	IP20, 1315x115mm
U1 0 2x36W	IP20, 1315x145mm

LED-T8

LED T8 TUBE



Description	LED-T8 60CM 230V-9W-G13-4000K	LED-T8-GL 60CM 230V-9W-G13-6500K	LED-T8 120CM 230V-18W-G13-4000K	LED-T8 120CM 230V-18W-G13-6500K	LED-T8 150CM 230V-24W-G13-4000K	LED-T8 150CM 230V-24W-G13-6500K
Wattage (W)	9	9	18	18	23	23
Lumen Output (lm)	1260	1260	2520	2520	3220	3220
Lumen Efficacy (lm/W)	140	140	140	140	140	140
Dimension D*L (mm)	600*30*30	600*30*30	1200*30*30	1200*30*30	1500*30*30	1500*30*30
Color Temp.	4000K	6500K	4000K	6500K	4000K	6500K
IP	IP20	IP20	IP20	IP20	IP20	IP20
Beam angle	200°	200°	200°	200°	200°	200°
LED	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
Cap	G13	G13	G13	G13	G13	G13
Input	AC220-240V	AC220-240V	AC220-240V	AC220-240V	AC220-240V	AC220-240V
Hz	50Hz	50Hz	50Hz	50Hz	50Hz	50Hz
Ra	80	80	80	80	80	80
PF	0,9	0,9	0,9	0,9	0,9	0,9
Life Time	25000h	25000h	25000h	25000h	25000h	25000h
EEL	A+	A+	A+	A+	A+	A+
Individual packaging	color box	color box	color box	color box	color box	color box

T8 FIXTURE FOR LED T8 TUBE

T8 FIXTURE 1x600mm + LED T8 TUBE 1x9W 1x9W, 600mm

T8 FIXTURE 2x600mm + LED T8 TUBE 2x9W 2x9W, 600mm

T8 FIXTURE 1x1200mm + LED T8 TUBE 1x18W 1x18W, 1200mm

T8 FIXTURE 2x1200mm + LED T8 TUBE 2x18W 2x18W, 1200mm

T8 FIXTURE 1x1500mm + LED T8 TUBE 1x24W 1x24W, 1500mm

T8 FIXTURE 2x1500mm + LED T8 TUBE 2x24W 2x24W, 1500mm



LED-T5 KONEKTIBILNE



Description	LED-T5-300-230V-4W-4000K	LED-T5-600-230V-8W-4000K	LED-T5-900-230V-10W-4000K	LED-T5-1200-230V-14W-4000K
Power (W)	4	8	10	14
Equivalent Fluorescent	8	14	21	28
CRI (Ra)	80	80	80	80
Color Temp.	4000K	4000K	4000K	4000K
Lumen Efficacy (lm/W)	80,0	80,0	80,0	80,0
Lumen Output (lm)	320	640	800	1120
Dimension D*L (mm)	313	573	873	1173
Beam Angle	120°	120°	120°	120°
Input	220-240V	220-240V	220-240V	220-240V
LED	SMD4014	SMD4014	SMD4014	SMD4014
LED QTY	26	48	70	90
Life Time (h)	25000h	25000h	25000h	25000h
Warranty	2 years	2 years	2 years	2 years


UX 340 RIGHT/DOWN

DRŽAČ UNIXIT UX01

DRŽAČ UNIXIT UX02

UX 340 RIGHT


UX 340 DOWN

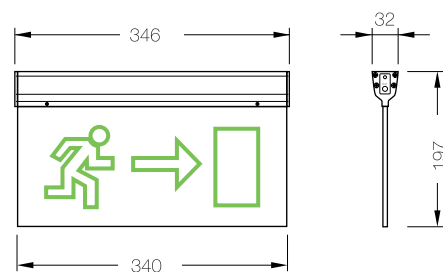

UX340




► UX01

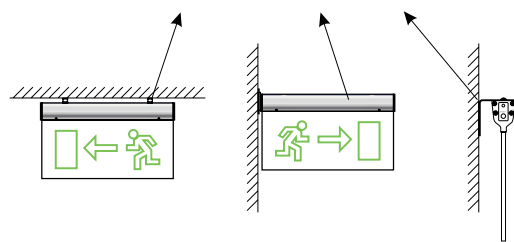

UNIXIT UX01

► UX02



UNIXIT UX02



LED-EME-507L50

LED-EME-507L50

4.4W, 400LM, IP65

PRIBOR ZA UGRADNJU

PRIBOR ZA OVJESNI PIKTOGRAM

NALJEPNICA





LED-EME-507L50



PRIBOR ZA UGRADNJU



PRIBOR ZA OVJESNI PIKTOGRAM

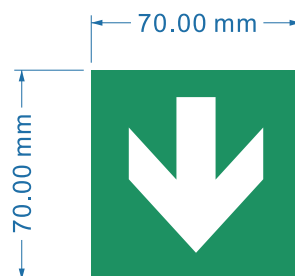


NALJEPNICA

HERMIT CRAB

HERMIT CRAB HC3M3528-01 BIJELA PANIK LED

HERMIT CRAB HC3M3528-32 SIVA PANIK LED

- Rated voltage: 220-240V~50Hz
- Power: 0.6W
- LED: SMD3528
- Mode of operation: Maintained
- Duration: 3h
- Battery: Ni-Mh 80mAh 3.6V
- NW(g): 52

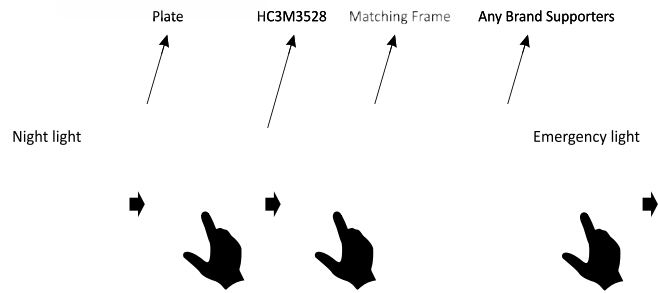

FAT-LED-F1B

FAT-LED-F1B EMERGENCY KIT




- **Dimension:** 250x40x28mm
- AC85-265V
- 18650 Li-ion11.7V
- 2400mAh
- 3-20W
- 120-60 mins

SMART LED

EKL0901 LED EMERGENCY KIT Duration: 1h, NW(g): 440

EKL0903 LED EMERGENCY KIT Duration: 3h, NW(g): 1040

- Rated voltage: 220-240V
- Mode of operation: Maintained
- Power: Max. 9W
- Battery: Ni-CD 1200mAh 9.6V (**EKL0901**)
Ni-CD 3500mAh 9.6V (**EKL0903**)

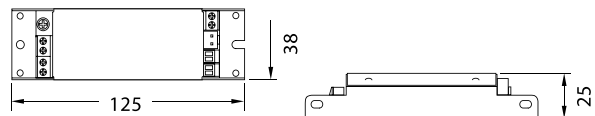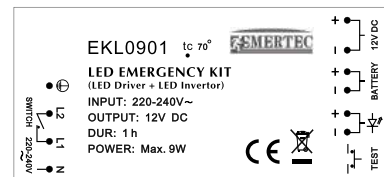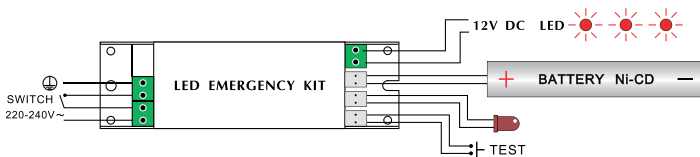

ST05C WHITE



ST05C

ST05C WHITE SENZOR POKRETA

- Power Source: 220-240V/AC
- Power Frequency: 50/60Hz
- Ambient Light: >3-2000LUX (adjustable)
- Time Delay: Min. 10sec±3sec, Max. 15min±2min
- Rated load: Max. 800W
400W
- Detection Range: 360°
- Detection Distance: 6m max (>24°C)
- Working Temperature: -20~+40°C
- Working Humidity: <93%RH
- Power Consumption: approx 0.5W
- Installation Height: 2.2-4m
- Detection Moving Speed: 0.6-1.5m/s

ST40 IP20

ST40 IP20 SENZOR UGRADNI STROPNI

- Power Source: 220-240V/AC
- Power Frequency: 50/60Hz
- Ambient Light: >3-2000LUX (adjustable)
- Time Delay: Min. 10sec±3sec, Max. 15min±2min
- Rated load: Max. 800W
400W
- Detection Range: 360°
- Detection Distance: 6m max (>24°C)
- Working Temperature: -20~+40°C
- Working Humidity: <93%RH
- Power Consumption: approx 0.5W
- Installation Height: 2.2-4m
- Detection Moving Speed: 0.6-1.5m/s



ST40 IP20

ST12 IP44

ST12 IP44 SENZOR POKRETA

- Power Source: 220-240V/AC
- Power Frequency: 50/60Hz
- Ambient Light: >3-2000LUX (adjustable)
- Time Delay: Min. 10sec±3sec, Max. 15min±2min
- Rated load: Max. 1200W
300W
- Detection Range: 180°
- Detection Distance: 12m max (>24°C)
- Working Temperature: -20~+40°C
- Working Humidity: <93%RH
- Power Consumption: approx 0.5W
- Installation Height: 1.8-2.5m
- Detection Moving Speed: 0.6-1.5m/s



ST12 IP44

ST56B

ST56B INFRARED LED SENSOR LAMP

- Power Source: 220-240V/AC
- Power Frequency: 50/60Hz
- Ambient Light: >3-2000LUX (adjustable)
- Time Delay: Min. 10sec±3sec, Max. 5min±1min
- Rated Load: Max. 15W (1100LM)
- Detection Range: 140°
- IP CLASS: IP65
- Detection Distance: 9m max (>24°C)
- Working Temperature: -20~+40°C
- Working Humidity: <93%RH
- Power Consumption: approx 0.5W
- Installation Height: 1.8-2.5m
- Detection Moving Speed: 0.6-1.5m/s



ST56B

ST15 IP65 WH/BL

ST15 IP65 WH SENZOR POKRETA

ST15 IP65 BL SENZOR POKRETA

- Power Source: 220-240V/AC
- Power Frequency: 50/60Hz
- Ambient Light: >3-2000LUX (adjustable)
- Time Delay: Min. 10sec±3sec, Max. 15min±2min
- Rated load: Max. 1200W
300W
- Detection Range: 180°
- Detection Distance: 12m max (>24°C)
- Working Temperature: -20~+40°C
- Working Humidity: <93%RH
- Power Consumption: approx 0.5W
- Installation Height: 1.8-2.5m
- Detection Moving Speed: 0.6-1.5m/s



ST15 IP65 WH



ST15 IP65 BL

ST122 IP20

ST122 IP20 SENZOR HAND

- Power Source: 220-240V/AC
- Power Frequency: 50/60Hz
- Rated Current: 5A
- Detection Distance: 5-6cm
- Rated Load: Max. 500W
200W
- Working Temperature: -20~+50°C



ST122 IP20

ST701D WHITE

ST701D WHITE SENZOR

- Power Source: 220-240V/AC
- Frequency: 50/60Hz
- Ambient Light: >3-2000LUX (adjustable)
- Time Delay: Min. 10sec±3sec, Max. 12min±1min
- Rated load: Max. 1200W
300W
- Detection Range: 360°
- Detection Distance: 1-8m (radius) adjust.
- HF System: 5.8GHz CW radar, ISM band
- Transmission Power: <
- Power Consumption: approx 0.9W
- Installation Height: 2-6m
- Detection Moving Speed: 0.6-1.5m/s



ST701D WHITE

PD-PIR 118 IP20

PD-PIR 118 IP20 SENZOR MODULARNI

- Power Source: 220-240V/AC
- Power Frequency: 50Hz
- Rated load: Max. 800W Max. tungsten
200W Max. fluorescent
- Detection Range: <7m (22°C)
- Time setting: Min. 9sec±2sec
Max: 3min±30sec (adjustable)
- Detection angle: 120°
- Light control: 10LUX-sunshine (adjustable)
- Working Temperature: -20~+40°C
- Working Humidity: <93%RH
- Power Consumption: approx 0.5W
- Installation Height: 1.5-2.5m



PD-PIR 118 IP20

PD-IN2007 IP20

PD-IN2007 IP20 PLAFONJERA SA SENZOROM

- Power Source: 220-240V/AC
- Power Frequency: 50Hz
- Time setting: 10sec/30sec/1min/2min/4min/6min/
12min/15min/18min/20min/22min/
25min/28min/30min/(adjustable)
- Rated load: 60W Max/E27
- Detection Angle: 360°
- Light control: 2LUX/50LUX/150LUX/2000LUX(adjustable)
- HF System: 5.8GHz CW electric wave, ISM band
- Detection range_ 1m-10m (radii)(adjustable)
- Installation: ceiling mount



PD-IN2007 IP20

ST78-5 E27

ST78-5 PLAFONJERA SA SENZOROM E27, 2x40W, IP20

- Power Source: 220-240V/AC
- Power Frequency: 50Hz
- Ambient light: <3-2000LUX (adjustable)
Time delay: Min. 10sec±3sec
Max: 3min±30 sec
- Rated load: Max 2x40W (E27)
- Detection Range: 360°
- Detection distance: max. 6m (<24°C)
- Working temperature: -20~+40°C
- Working humidity: <93%RH
- Installation height: 2.2-4m
Detection moving speed: 0.6-1.5m/s



ST78-5 E27

ST77A LED 12W

ST77A LED PLAFONJERA SA SENZOROM 12W

- Power Source: 110-240V/AC
- Power Frequency: 50/60Hz
- Ambient light: <3-2000LUX (adjustable)
- Time delay: Min. 10sec±3sec
Max: 3min±30 sec
- Rated load: 12W (800lm)
- Detection Range: 360°
- Detection distance: max. 6m (<24°C)
- Working temperature: -20~+40°C
- Working humidity: <93%RH
- Installation height: 2.2-4m
Detection moving speed: 0.6-1.5m/s



ST77A LED 12W

ST77AE LED 12W PANIK

ST77AE LED PLAFONJERA SA SENZOROM 12W PANIK

- Power Source: 110-240V/AC
- Power Frequency: 50/60Hz
- Ambient light: <3-2000LUX (adjustable)
- Time delay: Min. 10sec±3sec
Max: 3min±30 sec
- Rated load: 12W (800lm)
- Emergency Load: 1.2W (DC) (65lm)
- Detection Range: 360°
- Detection distance: max. 6m (<24°C)
- Working temperature: -20~+40°C
- Working humidity: <93%RH
- Installation height: 2.2-4m
- Battery: 3.7V/1500mAh lithium battery
- Detection Motion Speed: 0.6-1.5m/s
- Continuous illumination time: 5hours (when the battery power supply)



ST77AE LED 12W PANIK

ST71B 15W WHITE

ST71B LED ZIDNA SA SENZOROM 15W, WHITE

- Power Source: 110-240V/AC
- Power Frequency: 50/60Hz
- Ambient light: <3-2000LUX (adjustable)
- Time delay: Min. 10sec±3sec
Max: 5min±1 min
- Rated load: 15W (1250lm)
- Detection Motion Speed: 0.6-1.5m/s
- Detection Range: 160°/360°
- Detection distance: Wall - max. 9m (<24°C)
Ceiling - max. 6m (<24°C)
- Working temperature: -20~+40°C
- Working humidity: <93%RH
- Installation height: Wall - 1.8-2.5m
Ceiling - 2.2-4m



ST71B 15W



ST51 IP44

ST51 IP44 WH

ST51 ZIDNA SA SENZOROM IP44, WH

- Power Source: 220-240V/AC
- Power Frequency: 50Hz
- Ambient light: <3-2000LUX (adjustable)
- Time delay: Min. 10sec±3sec
Max: 5min±1 min
- Rated load: Max. 60W (E27)
- Detection Moving Speed: 0.6-1.5m/s
- Detection Range: 180°
- Detection distance: max. 9m (<24°C)
- Working temperature: -20~+40°C
- Working humidity: <93%RH
- Installation height: 1.8-2.5m

ST52 IP44 WH

ST52 ZIDNA SA SENZOROM IP44, WH

- Power Source: 220-240V/AC
- Power Frequency: 50Hz
- Ambient light: <3-2000LUX (adjustable)
- Time delay: Min. 10sec±3sec
Max: 5min±1 min
- Rated load: Max. 60W (E27)
- Detection Moving Speed: 0.6-1.5m/s
- Detection Range: 180°
- Detection distance: max. 9m (<24°C)
- Working temperature: -20~+40°C
- Working humidity: <93%RH
- Installation height: 1.8-2.5m



ST52 IP44

ST705A IP44 E27/60

ST705A PLAFONJERA SA SENZOROM IP44, E27/60

- Power Source: 220-240V/AC
- Power Frequency: 50/60Hz
- Ambient light: <3-2000LUX (adjustable)
- Time delay: Min. 10sec±3sec
Max: 12min±1min
- Rated load: 60W (E27)
- Additional switching capacity: 300W
- Detection Range: 360°
- Detection distance: 1.8m (radius), adjustable
- HF System: 5.8GHz CW radar, ISM band
- Transmission power: <0.2m/W
- Installation height: 2-4m
- Power consumption: approx 0.9W
- Detection Motion Speed: 0.6-1.5m/s



ST705A

ST706 K

ST706K MICROWAVE LED SENSOR LAMP

- Power Source: 220-240V/AC
- Power Frequency: 50/60Hz
- Ambient light: <3-2000LUX (adjustable)
- Time delay: Min. 10sec±3sec
Max: 12min±1min
- Rated load: 120W (800LM)
- Detection Motion Speed: 0,6-1,5m/s
- Detection Range: 180°/360°
- Detection distance: wall: 5-15m (adjustable); ceiling: 2-8m (radius) adjustable
- HF System: 5.8GHz CW radar, ISM band
- Transmission power: <0.2m/W
- Installation height: wall: 1,5-3,5m; ceiling: 2-4m
- Power consumption: approx 0.9W
- Detection Motion Speed: 0.6-1.5m/s



ST706K

E-CM08C

▪ **E-CM08C** PLAFONJERA SA SENZOROM 18W, IP54, 4000K

Dimension: Ø280x54mm



ES-G06



E-CM08C

ES-G06

ES.G06 LUXOMAT 15A MAX

LED-CL3-CIRCULAR, PANIK MODUL, *IP44



LED-CL3-CIRCULAR, PANIK MODUL

LED-CL3-CIRCULAR WHITE AC220-240V, 24W, 4000K, 1920lm, EM, IP44,
PANIK MODUL

- **Dimension:** Ø280x60mm

LED-CL3

LED-CL3-SQUARE 15W, 230V, Color temperature 4000K, 1050lm, Ra>80 Power factor>0.5, Life hts 25000h

- **Dimension:** 220x220x51mm

LED-CL3-SQUARE 18W, 230V, Color temperature 4000K, 1200lm, Ra>80 Power factor>0.5, Life hts 25000h

- **Dimension:** 280x280x51mm

LED-CL3-CIRCULAR 15W, 230V, Color temperature 4000K, 1050lm, Ra>80 Power factor>0.5, Life hts 25000h

- **Dimension:** Ø220x63mm

LED-CL3-CIRCULAR 18W, 230V, Color temperature 4000K, 1200lm, Ra>80 Power factor>0.5, Life hts 25000h

- **Dimension:** Ø280x63mm



LED-CL3-SQUARE



LED-CL3-CIRCULAR

PD-IN2061 IP20



PD-IN2061

PD-IN2061

PLAFONJERA SA SENZOROM

IP20

- Power Source: 220-240V/AC
- Power Frequency: 50Hz
- Transmission power: 1m/W
- Rated load: 2x40W E27 (max 5A)
- Protection level: IP20
- Detection angle: 360°
- Detection range: 2-10m (radius), adjustable
- Ambient light: <3-2000LUX (adjustable)
- Time setting: 8sec-12min (adjustable)
- Light control: 20LUX-daylight (adjustable)
- Installation sit: indoors, ceiling mounting

LED-WORK LIGHT-BL2S20A1-D6/E1/E2

LED-WORK LIGHT-BL2S20A1-D5 AC220-240V, 20W, 4000K, 1600lm, PF>0.5, IP65

LED-WORK LIGHT-BL2S50A1-D5 AC220-240V, 50W, 4000K, 4000lm, PF>0.9, IP65

LED-WORK LIGHT-BL2S50A1-E1 AC220-240V, 50W, 4000K, 4000lm, PF>0.9

LED-WORK LIGHT-BL2S50A1-E2 AC220-240V, 2x50W, 4000K, 2x4000lm, PF>0.9



LED-WORK LIGHT-BL2S50A1-E1



LED-WORK LIGHT-BL2S50A1-E2



LED-WORK LIGHT-BL2S20A1-D6 1600LM



LED-WORK LIGHT-BL2S50A1-D6 4000LM

LSD-SWL-1.5W BUTTERFLY

SOLARNA LED ZIDNA SVJETILJKA SA SA SENZOROM POKRETA

LSD-SWL-1.5W BUTTERFLY



LSD-SWL-1.5W BUTTERFLY

LSD-SWL-3.2W BUTTERFLY

SOLARNA LED ZIDNA SVJETILJKA SA SA SENZOROM POKRETA

LSD-SWL-3.2W BUTTERFLY



LSD-SWL-3.2W BUTTERFLY

LD-SFL-5W LEADPAD

SOLARNI LED REFLEKTOR SA SENZOROM POKRETA

LD-SFL-5W LEADPAD



LD-SFL-5W LEADPAD